


## COMBI Push In Type Plug In Connection 插拔式接線端

## COMBI Push In Type Plug In Connection

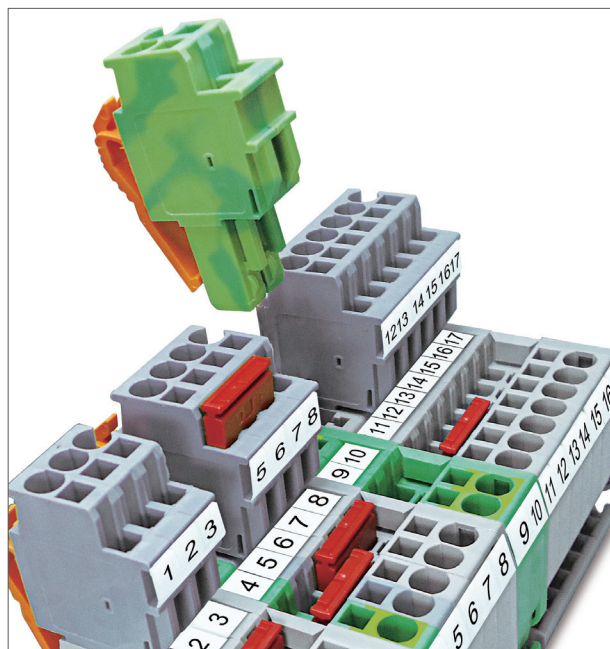


## COMBI Push In Type Plug In Connection

- Space-saving design/plug-in connectors.
- Vibration proof anti-loosening wire connection with pre-stressed spring Clamp.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy handling and safe connection
- The push-in connectors for self-assembly provide ... solutions that users can implement themselves.
- The connector is assembled directly on site by snapping together single-position connector elements.
- The modular structure also enables individual self-assembly of the plugs and the couplings.


## 插拔式接線端之特性

- 節省空間之設計 / 插件連接方式
- 高強度壓力的彈片迫緊連接方式，具有抗震與防鬆的效果
- 抗腐蝕性佳（使用良好的金屬材料）
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 推入式插件提供了用戶可自行安裝的解決方案
- 可依需求，利用插件相互卡接之特性組裝
- 模組化結構使用戶可自行組裝插件和配件

## DST 2.5/1P-D









CE cULus

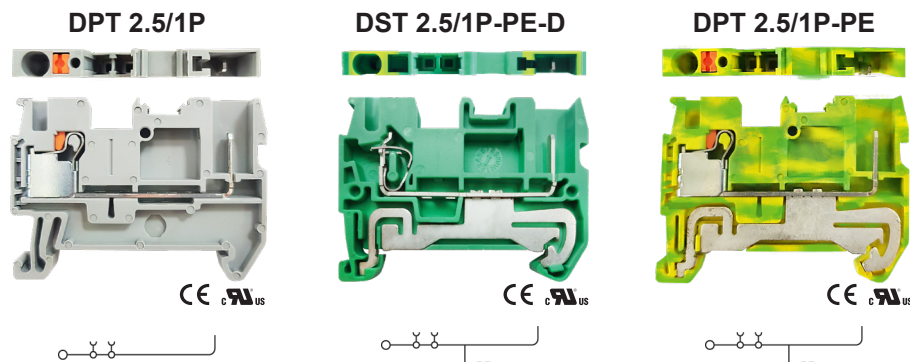

Specifications (產品規格)	2.5mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 20A / AWG 28-12	
CSA	600V / 20A / AWG 28-12	
IEC	500V / 24A / 0.08-2.5mm <sup>2</sup>	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm	
Material / Available Color (材質顏色)	● ● ● ●	
Dimensions (尺寸)	T / W / H (mm)	
For TS35 x 7.5	5.2 x 48.8 x 36.9	
For TS35 x 15	5.2 x 48.8 x 44.4	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)		
Comb Link (連接式聯接件)	ODFBS2-5	50
	ODFBS3-5	50
	ODFBS4-5	50
	ODFBS5-5	50
	ODFBS10-5	10
Marking Tags (標記號)	DCU-TMF5	10 (側面 96 位)
	DCU-TM5	10 (正面 96 位)
Tool (工具)	DS3 (0.4 x 3.5mm)	

## COMBI Push In Type Plug In Connection 插拔式接線端




Specifications (產品規格)	2.5mm <sup>2</sup>		2.5mm <sup>2</sup>		2.5mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 20A / AWG 26-12		600V / 20A / AWG 28-12		600V / 20A / AWG 28-12	
CSA	600V / 20A / AWG 26-12		600V / 20A / AWG 28-12		600V / 20A / AWG 28-12	
IEC	500V / 24A / 0.14-2.5mm <sup>2</sup>		500V / 24A / 0.08-2.5mm <sup>2</sup>		500V / 24A / 0.14-2.5mm <sup>2</sup>	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3		6KV / 3		6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)	● ● ● ●		● ●		● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35 x 7.5	5.2 x 48.8 x 36.8		5.2 x 48.8 x 36.9		5.2 x 48.8 x 36.8	
For TS35 x 15	5.2 x 48.8 x 44.6		5.2 x 48.8 x 44.4		5.2 x 48.8 x 44.6	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-ST2.5-D	50	DD-ST2.5-DP	50	DD-ST2.5-DP	50
Comb Link (連接式聯接件) 	ODFBS2-5	50	ODFBS2-5	50	ODFBS2-5	50
	ODFBS3-5	50	ODFBS3-5	50	ODFBS3-5	50
	ODFBS4-5	50	ODFBS4-5	50	ODFBS4-5	50
	ODFBS5-5	50	ODFBS5-5	50	ODFBS5-5	50
	ODFBS10-5	10	ODFBS10-5	10	ODFBS10-5	10
Marking Tags (標記號) 	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)
	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)
Tool (工具) 	DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)	


## COMBI Push In Type Plug In Connection 插拔式接線端

## COMBI Push In Type Plug In Connection

DSPB 2.5/XP (X=1~15)



DPP-H2.5/XP



Specifications (產品規格)	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / 20A / AWG 28-12	600V / 20A / AWG 28-12
<b>CSA</b>	600V / 20A / AWG 28-12	600V / 20A / AWG 28-12
<b>IEC</b>	500V / 24A / 0.08-2.5mm <sup>2</sup>	500V / 24A / 0.08-2.5mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree</b> (額定衝擊電壓 / 汙染等級)	6KV / 3	6KV / 3
<b>Insulation stripping length (mm)</b> (剝線長度)	10mm	10mm
<b>Material / Available Color (材質顏色)</b>		
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35 x 7.5	X * 5.2 x 22.9 x 39.7	5.2 x 17 x 39.7
<b>Accessories (附件)</b>	<b>Cat. No. Qty.</b>	<b>Cat. No. Qty.</b>
<b>Snap-lock fitting Plate (鎖定片)</b>	DPR2.5 50	DDPPH2.5 50
<b>Comb Link (邊接式聯接件)</b>	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10	無
<b>Marking Tags (標記號)</b>	DUC-TMF5 10 (側面 96 位)	DUC-TMF5 10 (側面 96 位)
<b>Tool (工具)</b>	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)


**Strain relief / Snap-lock Fitting**

**Strain relief (DZP)**

- Can be used in all connector versions
- The connector can be fixed using contact cable binders

**Snap-lock Fitting (DPR2.5)**

- Can be used in all connector versions
- Can be snapped into connector housing as an option



Technical Data		
Accessories (附件)	DZP	DPR
Material	PA66	PA66
Material / Available color (顏色)	Orange	Orange
Dimensions (外型尺寸)	T / W / H (mm)	T / W / H (mm)
	9.3 x 4.9 x 48.7	4.7 x 11.4 x 30.0
Terminal Blocks of application (應用軌道端子)	DSPB 系列 & DPP-H 系列	DSPB 系列 & DPP-H 系列
MOQ Minimum order quantity (最小訂購量)	50 PSC	50 PSC