


## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

## Features of Spring Clamp Ground Terminal Blocks





## Features of Spring Clamp Ground Terminal Blocks

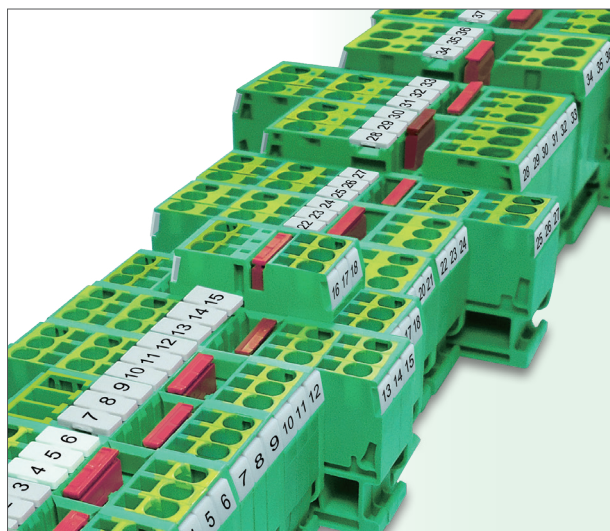


- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.

## 彈片接地型接線座之特性

- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 ( 頂部進線 )
- 抗腐蝕性佳 ( 使用良好的金屬材料 )
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易


## DST 1.5-PE-D

CE 


Specifications ( 產品規格 )	1.5mm <sup>2</sup>	
Technical Data ( 技術參數 )	Rated voltage / Rated current / Wire Size	
UL	600V / AWG 28-14	
CSA	600V / AWG 28-14	
IEC	500V / 0.08-1.5mm <sup>2</sup>	
Insulating impulse voltage withstand / Pollution degree ( 額定衝擊電壓 / 汙染等級 )	6KV / 3	
Insulation stripping length (mm) ( 剝線長度 )	10mm	
Material / Available Color ( 材質顏色 )		
Rail Dimensions ( 導軌尺寸 )	T / W / H (mm)	
For TS35x 7.5 	4.2 x 48.8 x 36.5	
For TS35x 15 	4.2 x 48.8 x 44	
Accessories ( 附件 )	Cat. No.	Qty.
End Bracket ( 終端擋板 ) 	SEW35	50
End Plate ( 擋板 ) 	DD-ST2.5-DP	50
Comb Link ( 連接式聯接件 ) 	ODFBS2-4	50
	ODFBS3-4	50
	ODFBS4-4	50
	ODFBS5-4	50
	ODFBS10-4	10
Marking Tags ( 標記號 ) 	DUC-TMF4	10 ( 側面 120 位 )
	DUC-TM4	10 ( 正面 120 位 )
Tool ( 工具 ) 	DS2 (0.4 x 2.5mm)	

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座





DST 1.5/3-PE-D



DST 1.5/4-PE-D




DST 2.5-PE-D



Specifications (產品規格)	1.5mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 28-14	600V / AWG 28-14	600V / AWG 28-12
<b>CSA</b>	600V / AWG 28-14	600V / AWG 28-14	600V / AWG 28-12
<b>IEC</b>	500V / 0.08-1.5mm <sup>2</sup>	500V / 0.08-1.5mm <sup>2</sup>	500V / 0.08-2.5mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	6KV / 3	6KV / 3	8KV / 3
<b>Insulation stripping length (mm) (剝線長度)</b>	10mm	10mm	10mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	4.2 x 60.7 x 36.5	4.2 x 72.6 x 36.5	5.2 x 48.8 x 36.5
For TS35x 15	4.2 x 60.7 x 44	4.2 x 72.6 x 44	5.2 x 48.8 x 44
<b>Accessories (附件)</b>	<b>Cat. No. Qty.</b>	<b>Cat. No. Qty.</b>	<b>Cat. No. Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35 50	SEW35 50	SEW35 50
<b>End Plate (擋板)</b>	DD-ST2.5/3-DP 50	DD-ST2.5/4-DP 50	DD-ST2.5-DP 50
<b>Comb Link (選接式聯接件)</b>	ODFBS2-4 50 ODFBS3-4 50 ODFBS4-4 50 ODFBS5-4 50 ODFBS10-4 10	ODFBS2-4 50 ODFBS3-4 50 ODFBS4-4 50 ODFBS5-4 50 ODFBS10-4 10	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10
<b>Marking Tags (標記號)</b>	DUC-TMF4 10 (側面 120 位) DUC-TM4 10 (正面 120 位)	DUC-TMF4 10 (側面 120 位) DUC-TM4 10 (正面 120 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)
<b>Tool (工具)</b>	DS2 (0.4 x 2.5mm)	DS2 (0.4 x 2.5mm)	DS3 (0.4 x 3.5mm)


## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

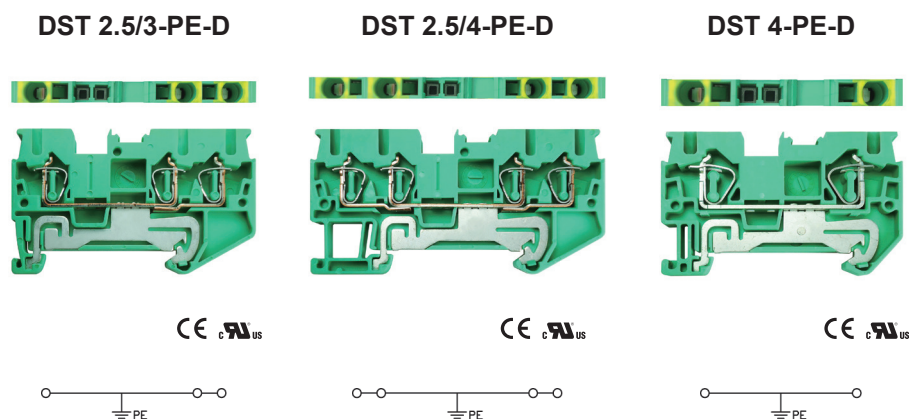


Specifications (產品規格)	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 28-12	600V / AWG 28-12	600V / AWG 28-10
<b>CSA</b>	600V / AWG 28-12	600V / AWG 28-12	600V / AWG 28-10
<b>IEC</b>	800V / 0.08-2.5mm <sup>2</sup>	800V / 0.08-2.5mm <sup>2</sup>	800V / 0.08-4mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (剝線長度)</b>	10mm	10mm	10mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5
For TS35x 15	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-ST2.5/3-DP    50	DD-ST2.5/4-DP    50	DD-ST4-DP    50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-5    50 ODFBS3-5    50 ODFBS4-5    50 ODFBS5-5    50 ODFBS10-5    10	ODFBS2-5    50 ODFBS3-5    50 ODFBS4-5    50 ODFBS5-5    50 ODFBS10-5    10	ODFBS2-6    50 ODFBS3-6    50 ODFBS4-6    50 ODFBS5-6    50 ODFBS10-6    10
<b>Marking Tags (標記號)</b>	DUC-TMF5    10 (側面 96 位) DUC-TM5    10 (正面 96 位)	DUC-TMF5    10 (側面 96 位) DUC-TM5    10 (正面 96 位)	DUC-TMF6    10 (側面 80 位) DUC-TM6    10 (正面 80 位)
<b>Tool (工具)</b>	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 4.0mm)

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座


DST 4/3-PE-D




CE




DST 4/4-PE-D




CE



DST 6-PE-D




CE




Specifications (產品規格)	4mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 28-10	600V / AWG 28-10	600V / AWG 24-8
<b>CSA</b>	600V / AWG 28-10	600V / AWG 28-10	600V / AWG 24-8
<b>IEC</b>	800V / 0.08-4mm <sup>2</sup>	800V / 0.08-4mm <sup>2</sup>	1000V / 0.2-6mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree</b> (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm)</b> (剝線長度)	10mm	10mm	12mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	6.2 x 71.7 x 36.5	6.2 x 87.3 x 36.5	8.2 x 69.5 x 43.5
For TS35x 15	6.2 x 71.7 x 44	6.2 x 87.3 x 44	8.2 x 69.5 x 51
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-ST4/3-DP    50	DD-ST4/4-DP    50	DD-ST6-DP    50
<b>Comb Link (選接式聯接件)</b>	ODFBS2-6    50 ODFBS3-6    50 ODFBS4-6    50 ODFBS5-6    50 ODFBS10-6    10	ODFBS2-6    50 ODFBS3-6    50 ODFBS4-6    50 ODFBS5-6    50 ODFBS10-6    10	ODFBS2-8    50 ODFBS3-8    50 ODFBS4-8    50 ODFBS5-8    50 ODFBS10-8    10
<b>Marking Tags (標記號)</b>	DUC-TMF6    10 (側面 80 位) DUC-TM6    10 (正面 80 位)	DUC-TMF6    10 (側面 80 位) DUC-TM6    10 (正面 80 位)	DUC-TMF8    10 (側面 56 位) DUC-TM8    10 (正面 56 位)
<b>Tool (工具)</b>	DS3 (0.4 x 4.0mm)	DS3 (0.4 x 4.0mm)	DS4 (0.4 x 5.5mm)

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座


DST 6/3-PE-D




CE cRU US




DST 10-PE-D




CE cRU US



DST 10/3-PE-D




CE




Specifications (產品規格)	6mm <sup>2</sup>	10mm <sup>2</sup>	10mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 24-8	600V / AWG 24-6	600V / AWG 24-6
<b>CSA</b>	600V / AWG 24-8	600V / AWG 24-6	600V / AWG 24-6
<b>IEC</b>	1000V / 0.2-6mm <sup>2</sup>	1000V / 0.2-10mm <sup>2</sup>	1000V / 0.2-10mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)</b>	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (剝線長度)</b>	12mm	18mm	18mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	8.2 x 90.5 x 43.5	10.2 x 71.3 x 50.5	10.2 x 95.3 x 50.5
For TS35x 15	8.2 x 90.5 x 51	10.2 x 71.3 x 58	10.2 x 95.3 x 58
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-ST6/3-DP    50	DD-ST10-DP    50	DD-ST10/3-DP    50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-8    50 ODFBS3-8    50 ODFBS4-8    50 ODFBS5-8    50 ODFBS10-8    10	ODFBS2-10    10 ODFBS5-10    10	ODFBS2-10    10 ODFBS5-10    10
<b>Marking Tags (標記號)</b>	DUC-TMF8    10 (側面 56 位) DUC-TM8    10 (正面 56 位)	DUC-TMF10    10 (側面 48 位) DUC-TM10    10 (正面 48 位)	DUC-TMF10    10 (側面 48 位) DUC-TM10    10 (正面 48 位)
<b>Tool (工具)</b>	DS3 (0.4 x 5.5mm)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座



DST 16-PE-D



DST 16/3-PE-D





CE  US



Specifications (產品規格)	16mm <sup>2</sup>	16mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 24-4	600V / AWG 24-4
<b>CSA</b>	600V / AWG 24-4	600V / AWG 24-4
<b>IEC</b>	1000V / 0.2-16mm <sup>2</sup>	1000V / 0.2-16mm <sup>2</sup>
<b>Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (剝線長度)</b>	18mm	18mm
<b>Material / Available Color (材質顏色)</b>		
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5 	12.2 x 80.6 x 51.5	12.2 x 107.8 x 51.5
For TS35x 15 	12.2 x 80.6 x 59	12.2 x 107.8 x 59
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b> 	SEW35    50	SEW35    50
<b>End Plate (擋板)</b> 	DD-ST16-DP    50	DD-ST16/3-DP    50
<b>Comb Link (邊接式聯接件)</b> 	ODFBS2-12    10	ODFBS2-12    10
<b>Marking Tags (標記號)</b> 	DUC-TMF12    10 (側面40位) DUC-TM12    10 (正面40位)	DUC-TMF12    10 (側面40位) DUC-TM12    10 (正面40位)
<b>Tool (工具)</b> 	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

## DSTTB 2.5-PE-D



<b>Specifications (產品規格)</b>	2.5mm <sup>2</sup>	
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	
<b>UL</b>	600V / AWG 28-12	
<b>CSA</b>	600V / AWG 28-12	
<b>IEC</b>	800V / 0.08-2.5mm <sup>2</sup>	
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)</b>	6KV / 3	
<b>Insulation stripping length (mm) (剝線長度)</b>	10mm	
<b>Material / Available Color (材質顏色)</b>		
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	
For TS35x 7.5	5.2 x 67.8 x 47.4	
For TS35x 15	5.2 x 67.8 x 54.9	
<b>Accessories (附件)</b>	<b>Cat. No.</b>	<b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35	50
<b>End Plate (擋板)</b>	DD-STTB2.5-DP	50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-5	50
	ODFBS3-5	50
	ODFBS4-5	50
	ODFBS5-5	50
	ODFBS10-5	10
<b>Marking Tags (標記號)</b>	DUC-TMF5	10 (側面 96 位)
	DUC-TM5	10 (正面 96 位)
<b>Tool (工具)</b>	DS3 (0.4 x 3.5mm)	