


Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

Features of Spring Clamp Terminal Blocks

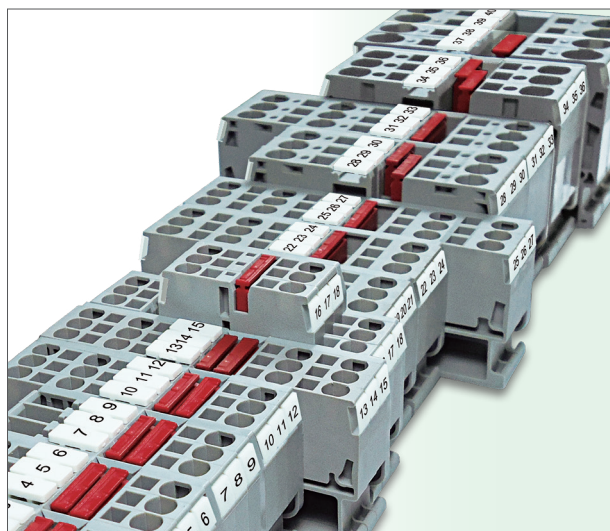


Features of Spring Clamp Terminal Blocks

- Space-saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismantling from the terminal rail.
- Corrosion-proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.

彈片壓接型接線座之特性

- 節省空間之特性 / 前緣導線連接方式
- 高強度壓力的彈度迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高

DST 1.5-D











CE cULus

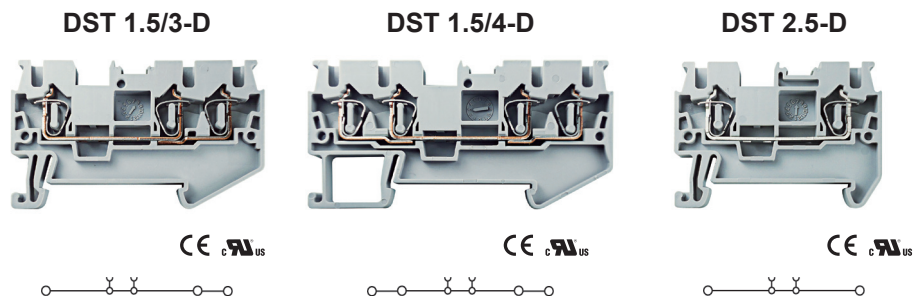


Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 28-14	
CSA	600V / 15A / AWG 28-14	
IEC	500V / 17.5A / 0.08-1.5mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm	
Material / Available Color (材質顏色)	● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x 7.5 	4.2 x 48.8 x 36.5	
For TS35x 15 	4.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	DD-ST2.5-D	50
Comb Link (邊接式聯接件) 	ODFBS2-4	50
	ODFBS3-4	50
	ODFBS4-4	50
	ODFBS5-4	50
	ODFBS10-4	10
Marking Tags (標記號) 	DUC-TMF4	10 (側面 120 位)
	DUC-TM4	10 (正面 120 位)
Tool (工具) 	DS2 (0.4 x 2.5mm)	

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座




Specifications (產品規格)	1.5mm ²	1.5mm ²	2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 28-14		600V / 20A / AWG 28-12	
CSA	600V / 15A / AWG 28-14		600V / 20A / AWG 28-12	
IEC	500V / 17.5A / 0.08-1.5mm ²		800V / 31A / 0.08-2.5mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3		8KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm	
Material / Available Color (材質顏色)	● ● ● ● ●		● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5 	4.2 x 60.7 x 36.5		5.2 x 48.8 x 36.5	
For TS35x 15 	4.2 x 60.7 x 44		5.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	DD-ST2.5/3-D	50	DD-ST2.5/4-D	50
Comb Link (邊接式聯接件) 	ODFBS2-4	50	ODFBS2-4	50
	ODFBS3-4	50	ODFBS3-4	50
	ODFBS4-4	50	ODFBS4-4	50
	ODFBS5-4	50	ODFBS5-4	50
	ODFBS10-4	10	ODFBS10-4	10
Marking Tags (標記號) 	DUC-TMF4	10 (側面 120 位)	DUC-TMF4	10 (側面 120 位)
	DUC-TM4	10 (正面 120 位)	DUC-TM4	10 (正面 120 位)
Tool (工具) 	DS2 (0.4 x 2.5mm)		DS2(0.4 x 2.5mm)	
			DS3(0.4 x 3.5mm)	

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

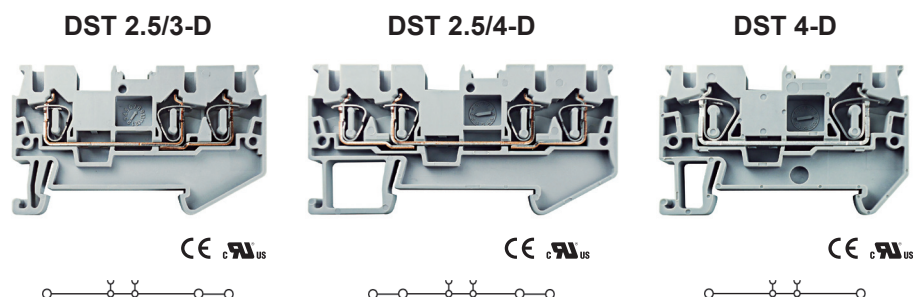


Specifications (產品規格)	2.5mm ²	2.5mm ²	4mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 20A / AWG 28-12	600V / 20A / AWG 28-12	600V / 30A / AWG 28-10
CSA	600V / 20A / AWG 28-12	600V / 20A / AWG 28-12	600V / 30A / AWG 28-10
IEC	800V / 28A / 0.08-2.5mm ²	800V / 28A / 0.08-2.5mm ²	800V / 40A / 0.08-4mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5
For TS35x 15	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST2.5/3-D 50	DD-ST2.5/4-D 50	DD-ST4-D 50
Comb Link (邊接式聯接件)	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10
Marking Tags (標記號)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)
Tool (工具)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 4.0mm)

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

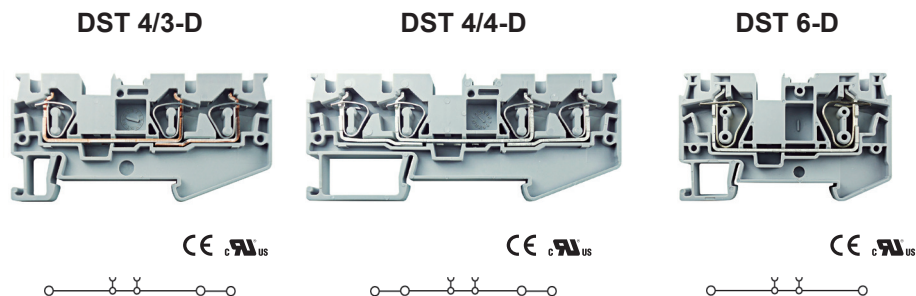


Specifications (產品規格)	4mm ²	4mm ²	6mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 30A / AWG 28-10	600V / 30A / AWG 28-10	600V / 48A / AWG 24-8
CSA	600V / 30A / AWG 28-10	600V / 30A / AWG 28-10	600V / 48A / AWG 24-8
IEC	800V / 40A / 0.08-4mm ²	800V / 40A / 0.08-4mm ²	1000V / 52A / 0.2-6mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	12mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	6.2 x 71.7 x 36.5	6.2 x 87.3 x 36.5	8.2 x 69.5 x 43.5
For TS35x 15	6.2 x 71.7 x 44	6.2 x 87.3 x 44	8.2 x 69.5 x 51
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST4/3-D 50	DD-ST4/4-D 50	DD-ST6-D 50
Comb Link (邊接式聯接件)	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 50 ODFBS5-8 50 ODFBS10-8 10
Marking Tags (標記號)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)
Tool (工具)	DS3 (0.4 x 4.0mm)	DS3 (0.4 x 4.0mm)	DS4 (0.4 x 5.5mm)

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

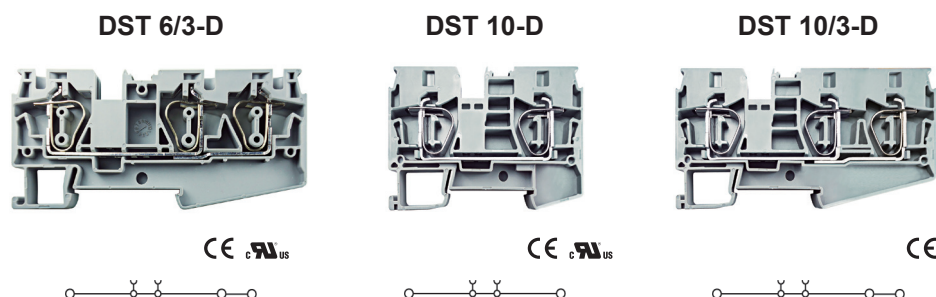


Specifications (產品規格)	6mm ²	10mm ²	10mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 48A / AWG 24-8	600V / 65A / AWG 24-6	600V / 60A / AWG 24-6
CSA	600V / 48A / AWG 24-8	600V / 65A / AWG 24-6	600V / 60A / AWG 24-6
IEC	800V / 52A / 0.2-6mm ²	1000V / 65A / 0.2-10mm ²	1000V / 65A / 0.2-10mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	12mm	18mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	8.2 x 90.5 x 43.5	10.2 x 71.3 x 50.5	10.2 x 95.3 x 50.5
For TS35x 15	8.2 x 90.5 x 51	10.2 x 71.3x 58	10.2 x 95.3 x 58
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST6/3-D 50	DD-ST10-D 50	DD-ST10/3-D 50
Comb Link (邊接式聯接件)	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 50 ODFBS5-8 50 ODFBS10-8 10	ODFBS2-10 10 ODFBS5-10 10	ODFBS2-10 10 ODFBS5-10 10
Marking Tags (標記號)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)	DUC-TMF10 10 (側面 48 位) DUC-TM10 10 (正面 48 位)	DUC-TMF10 10 (側面 48 位) DUC-TM10 10 (正面 48 位)
Tool (工具)	DS4 (0.4 x 5.5mm)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)



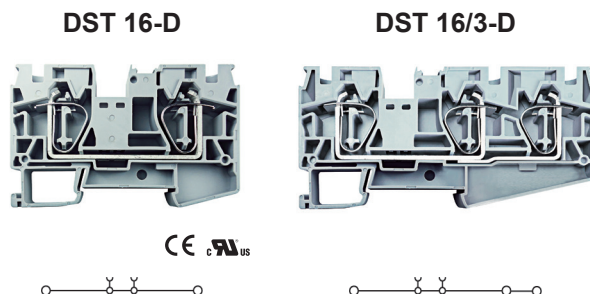




Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

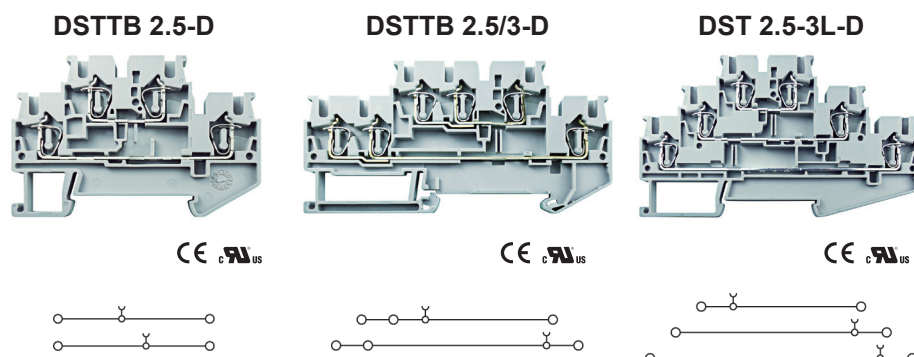


Specifications (產品規格)	16mm ²	16mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 80A / AWG 24-4	600V / 80A / AWG 24-4
CSA	600V / 80A / AWG 24-4	600V / 80A / AWG 24-4
IEC	1000V / 90A / 0.2-16mm ²	1000V / 90A / 0.2-16mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	18mm	18mm
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x 7.5	12.2 x 80.6 x 51.5	12.2 x 107.8 x 51.5
For TS35x 15	12.2 x 80.6 x 59	12.2 x 107.8 x 59
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST16-D 50	DD-ST16/3-D 50
Comb Link (邊接式聯接件)	ODFBS2-12 10	ODFBS2-12 10
Marking Tags (標記號)	DUC-TMF12 10 (側面 40 位) DUC-TM12 10 (正面 40 位)	DUC-TMF12 10 (側面 40 位) DUC-TM12 10 (正面 40 位)
Tool (工具)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座



Specifications (產品規格)	2.5mm ²		2.5mm ²		2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 20A / AWG 28-12		300V / 20A / AWG 28-12		600V / 20A / AWG 28-12	
CSA	600V / 20A / AWG 28-12		300V / 20A / AWG 28-12		600V / 20A / AWG 28-12	
IEC	500V / 26A / 0.08-2.5mm ²		500V / 26A / 0.08-2.5mm ²		500V / 26A / 0.08-2.5mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3		6KV / 3		6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)	● ● ● ● ●		● ● ● ● ●		● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5 	5.2 x 67.8 x 47.7		5.2 x 91.3 x 47.7		5.2 x 99.6 x 58	
For TS35x 15 	5.2 x 67.8 x 54.9		5.2 x 91.3 x 54.9		5.2 x 99.6 x 65.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-STTB2.5-D	50	DD-STTB2.5/3-D	50	DD-ST2.5-3L-D	50
Comb Link (邊接式聯接件) 	ODFBS2-5	50	ODFBS2-5	50	ODFBS2-5	50
	ODFBS3-5	50	ODFBS3-5	50	ODFBS3-5	50
	ODFBS4-5	50	ODFBS4-5	50	ODFBS4-5	50
	ODFBS5-5	50	ODFBS5-5	50	ODFBS5-5	50
	ODFBS10-5	10	ODFBS10-5	10	ODFBS10-5	10
Marking Tags (標記號) 	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)
	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)
Tool (工具) 	DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)	


Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

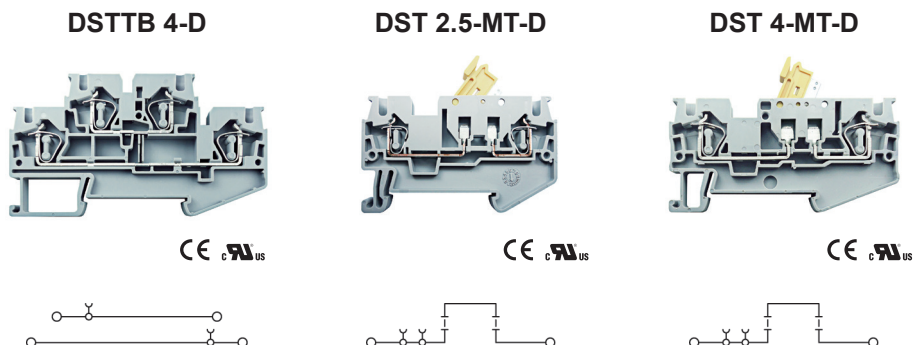



Specifications (產品規格)	2.5mm ²	2.5mm ²	4mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 30A / AWG 28-10	600V / 16A / AWG 28-12	600V / 21A / AWG 28-10
CSA	600V / 30A / AWG 28-10	600V / 16A / AWG 28-12	600V / 21A / AWG 28-10
IEC	500V / 32A / 0.08-4mm ²	400V / 20A / 0.08-2.5mm ²	400V / 20A / 0.08-4mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	6KV / 3	6KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	6.2 x 83.7 x 47.5	5.2 x 60.6 x 36.5	6.2 x 71.7 x 36.5
For TS35x 15	6.2 x 83.7 x 55	5.2 x 60.6x 44	6.2 x 71.7 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-STTB4-D 50	DD-ST2.5/3-D 50	DD-ST4/3-D 50
Comb Link (邊接式聯接件)	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10	ODFBS2-5 50 ODFBS3-5 50 ODFBS4-5 50 ODFBS5-5 50 ODFBS10-5 10	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10
Marking Tags (標記號)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)
Tool (工具)	DS3 (0.4 x 4.0mm)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 4.0mm)

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座


DST 4-HESILED24-D










DST 4-HESILED60-D




DST 4-HESILED250-D





Specifications (產品規格)	4mm ²		4mm ²		4mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 10A / AWG 28-10		600V / 10A / AWG 28-10		600V / 10A / AWG 28-10	
CSA	600V / 10A / AWG 28-10		600V / 10A / AWG 28-10		600V / 10A / AWG 28-10	
IEC	500V / 6.3A / 0.08-4mm ²		500V / 6.3A / 0.08-4mm ²		500V / 6.3A / 0.08-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	4KV / 3		4KV / 3		4KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)	●		●		●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5 	6.2 x 61.6 x 65		6.2 x 61.6 x 65		6.2 x 61.6 x 65	
For TS35x 15 	6.2 x 61.6 x 72.5		6.2 x 61.6 x 72.5		6.2 x 61.6 x 72.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 						
Comb Link (邊接式聯接件) 	ODFBS2-6	50	ODFBS2-6	50	ODFBS2-6	50
	ODFBS3-6	50	ODFBS3-6	50	ODFBS3-6	50
	ODFBS4-6	50	ODFBS4-6	50	ODFBS4-6	50
	ODFBS5-6	50	ODFBS5-6	50	ODFBS5-6	50
	ODFBS10-6	10	ODFBS10-6	10	ODFBS10-6	10
Marking Tags (標記號) 	DUC-TMF6	10 (側面 80 位)	DUC-TMF6	10 (側面 80 位)	DUC-TMF6	10 (側面 80 位)
	DUC-TM6	10 (正面 80 位)	DUC-TM6	10 (正面 80 位)	DUC-TM6	10 (正面 80 位)
Tool (工具) 	DS3 (0.4 x 4.0mm)		DS3 (0.4 x 4.0mm)		DS3 (0.4 x 4.0mm)	

Features of Spring Clamp Terminal Blocks 彈片壓接型接線座

DST 4-HEDI-D




DST 4-HESI-D

Specifications (產品規格)	4mm ²		4mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 10A / AWG 28-10		600V / 10A / AWG 28-10	
CSA	600V / 10A / AWG 28-10		600V / 10A / AWG 28-10	
IEC	500V / 20A / 0.08-4mm ²		500V / 6.3A / 0.08-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3		6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm	
Material / Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5	6.2 x 61.6 x 65		6.2 x 61.6 x 65	
For TS35x 15	6.2 x 61.6 x 72.5		6.2 x 61.6 x 72.5	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50
End Plate (擋板)				
Comb Link (邊接式聯接件)	ODFBS2-6	50	ODFBS2-6	50
	ODFBS3-6	50	ODFBS3-6	50
	ODFBS4-6	50	ODFBS4-6	50
	ODFBS5-6	50	ODFBS5-6	50
	ODFBS10-6	10	ODFBS10-6	10
Marking Tags (標記號)	DUC-TMF6	10 (側面 80 位)	DUC-TMF6	10 (側面 80 位)
	DUC-TM6	10 (正面 80 位)	DUC-TM6	10 (正面 80 位)
Tool (工具)	DS3 (0.4 x 4.0mm)		DS3 (0.4 x 4.0mm)	