


Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

PUSH IN SREIES

Push In Spring Clamp Terminal Blocks




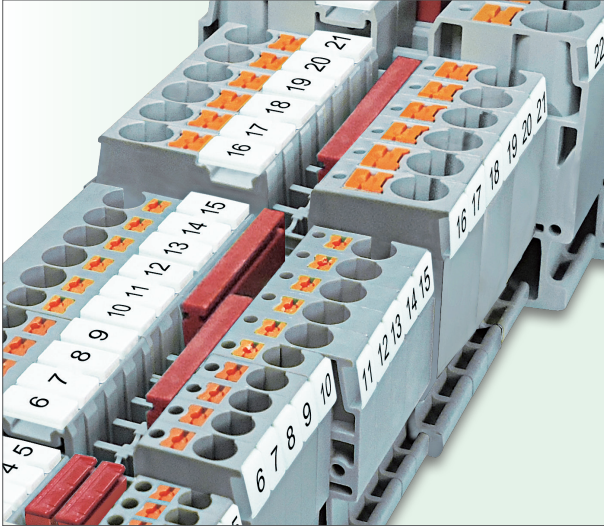






Push In Spring Clamp Terminal Blocks

- Space-saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion-proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.


推入式彈片壓接型接線座








- 節省空間之特性 / 前緣導線連接方式
- 高強度壓力的彈度迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

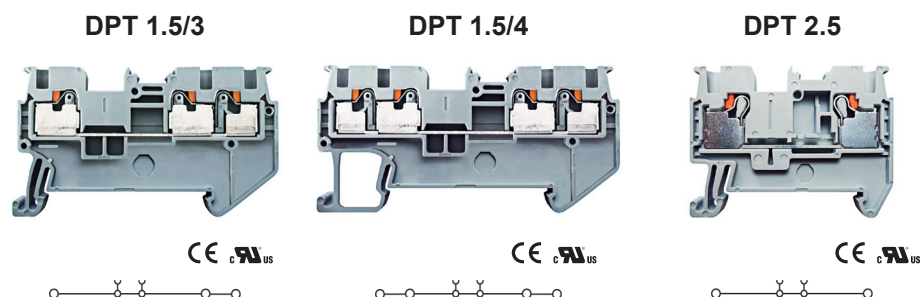


Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 26-14	
CSA	600V / 15A / AWG 26-14	
IEC	500V / 17.5A / 0.14-1.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm	
Material / Available Color (材質顏色)	● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x 7.5 	3.5 x 45 x 32	
For TS35x 15 	3.5 x 45 x 39.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	DD-PT1.5-D	50
Comb Link (邊接式聯接件) 	ODFBS2-3.5	50
	ODFBS3-3.5	50
	ODFBS4-3.5	50
	ODFBS5-3.5	50
	ODFBS10-3.5	10
Marking Tags (標記號) 	DUC-TMF3.5	10 (側面 144 位)
	DUC-TM3.5	10 (正面 144 位)
Tool (工具) 	DS2 (0.4 x 2.0mm)	








Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

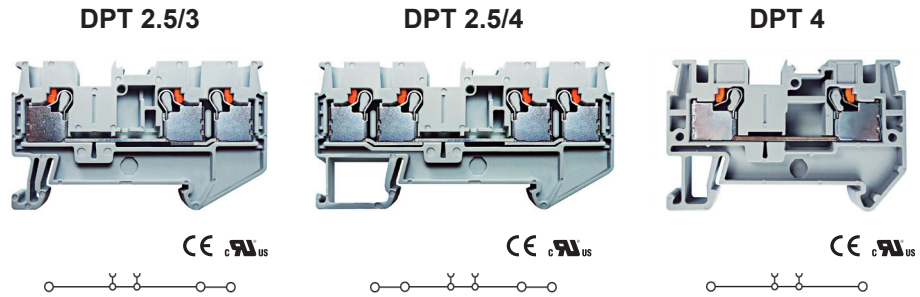


Specifications (產品規格)	1.5mm ²		1.5mm ²		2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 26-14		600V / 15A / AWG 26-14		600V / 20A / AWG 26-12	
CSA	600V / 15A / AWG 26-14		600V / 15A / AWG 26-14		600V / 20A / AWG 26-12	
IEC	500V / 17.5A / 0.14-1.5mm ²		500V / 17.5A / 0.14-1.5mm ²		800V / 24A / 0.14-2.5mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3		6KV / 3		8KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)	● ● ● ● ●		● ● ● ● ●		● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5 	3.5 x 54.1 x 32		3.5 x 63.2 x 32		5.2 x 48.5 x 36.5	
For TS35x 15 	3.5 x 54.1 x 39.5		3.5 x 63.2 x 39.5		5.2 x 48.5 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT1.5/3-D	50	DD-PT1.5/4-D	50	DD-PT2.5-D	50
Comb Link (邊接式聯接件) 	ODFBS2-3.5	50	ODFBS2-3.5	50	ODFBS2-5	50
	ODFBS3-3.5	50	ODFBS3-3.5	50	ODFBS3-5	50
	ODFBS4-3.5	50	ODFBS4-3.5	50	ODFBS4-5	50
	ODFBS5-3.5	50	ODFBS5-3.5	50	ODFBS5-5	50
	ODFBS10-3.5	10	ODFBS10-3.5	10	ODFBS10-5	10
Marking Tags (標記號) 	DUC-TMF3.5	10 (側面 144 位)	DUC-TMF3.5	10 (側面 144 位)	DUC-TMF5	10 (側面 96 位)
	DUC-TM3.5	10 (正面 144 位)	DUC-TM3.5	10 (正面 144 位)	DUC-TM5	10 (正面 96 位)
Tool (工具) 	DS2 (0.4 x 2.0mm)		DS2 (0.4 x 2.0mm)		DS3 (0.4*3.5mm)	

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座




Specifications (產品規格)	2.5mm ²		2.5mm ²		4mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 20A / AWG 26-12		600V / 20A / AWG 26-12		600V / 30A / AWG 24-10	
CSA	600V / 20A / AWG 26-12		600V / 20A / AWG 26-12		600V / 30A / AWG 24-10	
IEC	800V / 24A / 0.14-2.5mm ²		800V / 24A / 0.14-2.5mm ²		800V / 32A / 0.2-4mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)	● ● ● ● ●		● ● ● ● ●		● ● ● ● ●	
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x 7.5 	5.2 x 60.7 x 36.5		5.2 x 72.4 x 36.5		6.2 x 56.1 x 36.5	
For TS35x 15 	5.2 x 60.7 x 44		5.2 x 72.4 x 44		6.2 x 56.1 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT2.5/3-D	50	DD-PT2.5/4-D	50	DD-PT4-D	50
Comb Link (邊接式聯接件) 	ODFBS2-5	50	ODFBS2-5	50	ODFBS2-6	50
	ODFBS3-5	50	ODFBS3-5	50	ODFBS3-6	50
	ODFBS4-5	50	ODFBS4-5	50	ODFBS4-6	50
	ODFBS5-5	50	ODFBS5-5	50	ODFBS5-6	50
	ODFBS10-5	10	ODFBS10-5	10	ODFBS10-6	10
Marking Tags (標記號) 	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)	DUC-TMF6	10 (側面 80 位)
	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)	DUC-TM6	10 (正面 80 位)
Tool (工具) 	DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)	

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

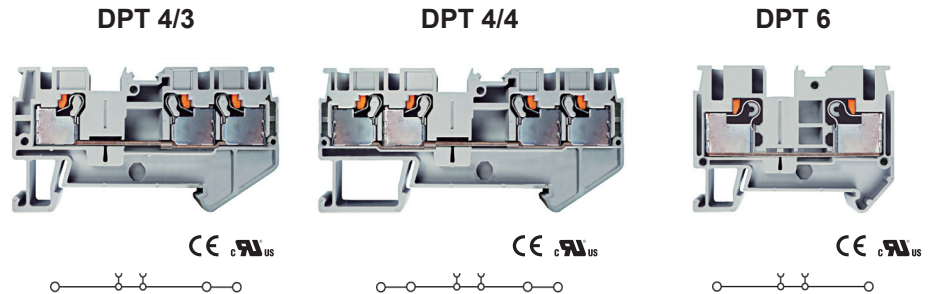


Specifications (產品規格)	4mm ²	4mm ²	6mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 30A / AWG 24-10	600V / 30A / AWG 24-10	600V / 43A / AWG 20-8
CSA	600V / 30A / AWG 24-10	600V / 30A / AWG 24-10	600V / 43A / AWG 20-8
IEC	800V / 32A / 0.2-4mm ²	800V / 32A / 0.2-4mm ²	1000V / 41A / 0.5-6mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	12mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	6.2 x 66.5 x 36.5	6.2 x 77 x 36.5	8.2 x 57.7 x 43.5
For TS35x 15	6.2 x 66.5 x 44	6.2 x 77 x 44	8.2 x 57.7 x 51
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT4/3-D 50	DD-PT4/4-D 50	DD-PT6-D 50
Comb Link (邊接式聯接件)	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10	ODFBS2-6 50 ODFBS3-6 50 ODFBS4-6 50 ODFBS5-6 50 ODFBS10-6 10	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 50 ODFBS5-8 50 ODFBS10-8 50
Marking Tags (標記號)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (正面 80 位)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)
Tool (工具)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)	DS4 (0.4 x 5.5mm)

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

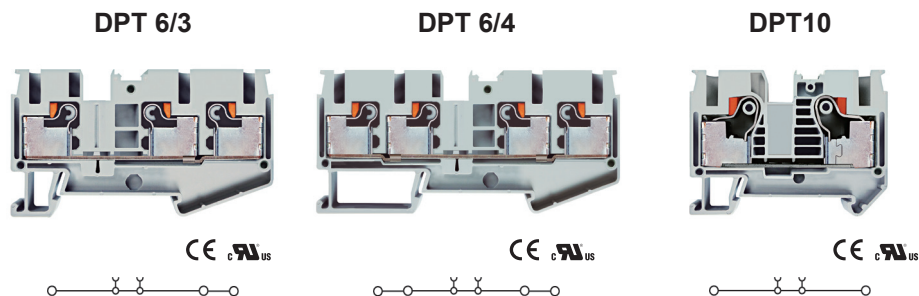


Specifications (產品規格)	6mm ²	6mm ²	10mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 43A / AWG 20-8	600V / 43A / AWG 20-8	600V / 60A / AWG 20-6
CSA	600V / 43A / AWG 20-8	600V / 43A / AWG 20-8	600V / 60A / AWG 20-6
IEC	1000V / 41A / 0.5-6mm ²	1000V / 41A / 0.5-6mm ²	1000V / 57A / 0.5-10mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	12mm	12mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	8.2 x 74.2 x 43.5	8.2 x 90.6 x 43.5	10.2 x 67.7 x 50.5
For TS35x 15	8.2 x 74.2 x 51	8.2 x 90.6 x 51	10.2 x 67.7 x 58
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT6/3-D 50	DD-PT6/4-D 50	DD-PT10-D 50
Comb Link (邊接式聯接件)	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 50 ODFBS5-8 50 ODFBS10-8 10	ODFBS2-8 50 ODFBS3-8 50 ODFBS4-8 50 ODFBS5-8 50 ODFBS10-8 10	ODFBS2-10 10 ODFBS5-10 10
Marking Tags (標記號)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)	DUC-TMF8 10 (側面 56 位) DUC-TM8 10 (正面 56 位)	DUC-TMF10 10 (側面 48 位) DUC-TM10 10 (正面 48 位)
Tool (工具)	DS4 (0.4 x 5.5mm)	DS4 (0.4 x 5.5mm)	DS50 (0.4 x 6.5mm)

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

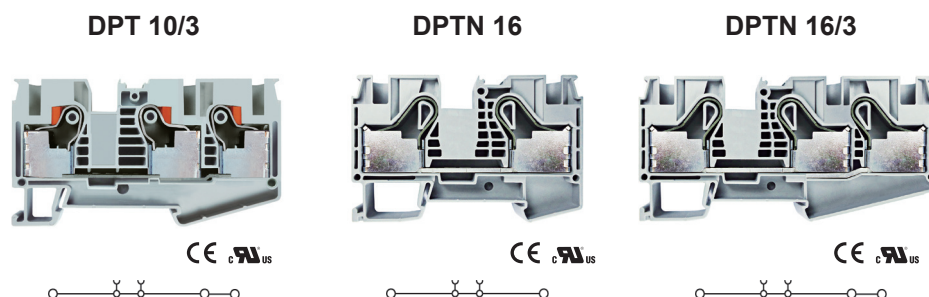

Specifications (產品規格)	10mm ²	16mm ²	16mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 60A / AWG 20-6	600V / 85A / AWG 20-4	600V / 85A / AWG 20-4
CSA	600V / 60A / AWG 20-6	600V / 85A / AWG 20-4	600V / 85A / AWG 20-4
IEC	1000V / 57A / 0.5-10mm ²	1000V / 76A / 0.5-16mm ²	1000V / 76A / 0.5-16mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	18mm	18mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	10.2 x 88.9 x 50.5	12.2 x 77.6 x 51.5	12.2 x 104 x 51.5
For TS35x 15	10.2 x 88.9 x 58	12.2 x 77.6 x 59	12.2 x 104 x 59
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT10/3-D 50	DD-PTN16-D 50	DD-PTN16/3-D 50
Comb Link (邊接式聯接件)	ODFBS2-10 10 ODFBS5-10 10	ODFBS2-12 10	ODFBS2-12 10
Marking Tags (標記號)	DUC-TMF10 10 (側面 48 位) DUC-TM10 10 (正面 48 位)	DUC-TMF12 10 (側面 40 位) DUC-TM12 10 (正面 40 位)	DUC-TMF12 10 (側面 40 位) DUC-TM12 10 (正面 40 位)
Tool (工具)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)


Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

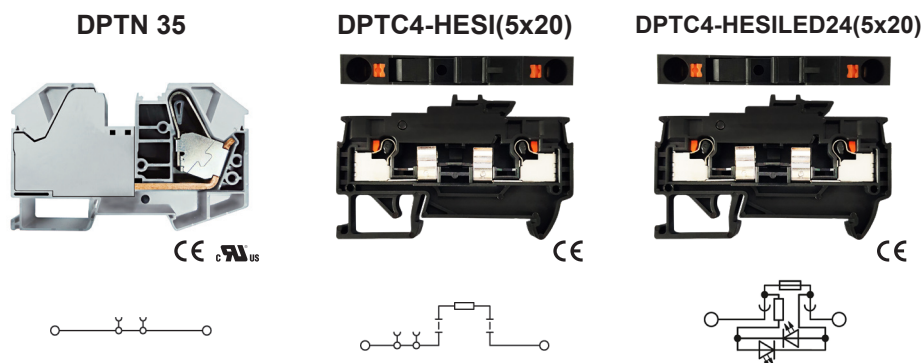


Specifications (產品規格)	35mm ²	4mm ²	4mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 115A / AWG 14-2	無	無
CSA	600V / 115A / AWG 14-2	無	無
IEC	1000V / 125A / 2.5-35mm ²	500V / 6.3A / 0.2-4mm ²	500V / 6.3A / 0.2-4mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	25mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	16 x 100 x 63.2	8.2 x 67.8 x 41.02	8.2 x 67.8 x 41.02
For TS35x 15	16 x 100 x 70.7	8.2 x 67.8 x 48.52	8.2 x 67.8 x 48.52
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)		DD-PTC4-HESI-D	DD-PTC4-HESI-D
Comb Link (連接式聯接件)	ODFBS2-16 10	無	無
Marking Tags (標記號)	DUC-TMF16 10 (側面 32 位) DUC-TM16 10 (正面 32 位)	DUC-TMF8 10 (側面 56 位) DUC-TMF6 10 (側面 80 位)	DUC-TMF8 10 (側面 56 位) DUC-TMF6 10 (側面 80 位)
Tool (工具)	DS5 (0.4 x 8.0mm)	DS2 (0.4 x 3.5mm)	DS2 (0.4 x 3.5mm)

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座


DPTTB 1.5



DPTTB 2.5



DPTTB 4




Specifications (產品規格)	1.5mm ²	2.5mm ²	4mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 15A / AWG 26-14	600V / 20A / AWG 28-12	600V / 30A / AWG 24-10
CSA	600V / 15A / AWG 26-14	600V / 20A / AWG 28-12	600V / 30A / AWG 24-10
IEC	500V / 17.5A / 0.14-1.5mm ²	800V / 24A / 0.08-2.5mm ²	800V / 32A / 0.2-4mm ²
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	3.5 x 65.4 x 42.9	5.2 x 78.8 x 47.6	6.2 x 85 x 47.5
For TS35x 15	3.5 x 65.4 x 50.4	5.2 x 78.8 x 55.5	6.2 x 85 x 55
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PTTB1.5-D	DD-PTTB2.5-D	DD-PTTB4-D
Comb Link (邊接式聯接件)	ODFBS2-3.5 ODFBS3-3.5 ODFBS4-3.5 ODFBS5-3.5 ODFBS10-3.5	ODFBS2-5 ODFBS3-5 ODFBS4-5 ODFBS5-5 ODFBS10-5	ODFBS2-6 ODFBS3-6 ODFBS4-6 ODFBS5-6 ODFBS10-6
Marking Tags (標記號)	DUC-TMF3.5 10 (側面 144 位) DUC-TM3.5 10 (側面 144 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (側面 80 位)
Tool (工具)	DS2 (0.4 x 2.0mm)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

DPT2.5/4-DIO/L-R

DPT2.5/4-DIO/R-L

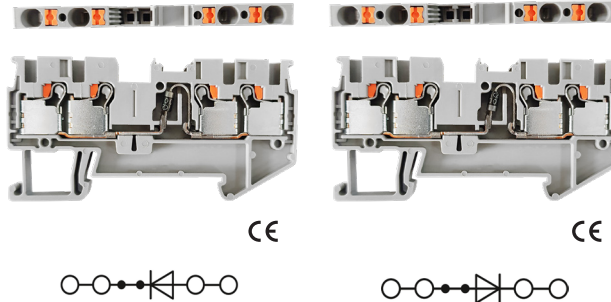

Specifications (產品規格)	2.5mm ²	2.5mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	300V / 0.5A / AWG 26-12	300V / 0.5A / AWG 26-12
CSA	300V / 0.5A / AWG 26-12	300V / 0.5A / AWG 26-12
IEC	800V / 0.5A / 0.14-2.5mm ²	800V / 0.5A / 0.14-2.5mm ²
DIODE	IN 4007(1000V 0.5A)	IN 4007(1000V 0.5A)
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	5.2 x 72.2 x 36.8	5.2 x 78.8 x 47.6
For TS35x 15	5.2 x 72.2 x 44.3	5.2 x 78.8 x 55.5
Accessories (附件)	Cat. No.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35	SEW35
End Plate (擋板)	DD-PT2.5/4-D	DD-PT2.5/4-D
Comb Link (邊接式聯接件)	ODDFBS2-5 ODFBS3-5 ODFBS4-5 ODFBS5-5 ODFBS3-10-5	ODDFBS2-5 ODFBS3-5 ODFBS4-5 ODFBS5-5 ODFBS3-10-5
Marking Tags (標記號)	DUC-TMF5 10 片 (側面 96 位) DUC-TM5 10 片 (正面 96 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)
Tool (工具)	0.4 x 3.5mm	DS3 (0.4 x 3.5mm)