


## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

### PUSH IN GROUNDING SERIES

#### Push In Spring Clamp Ground Terminal Blocks

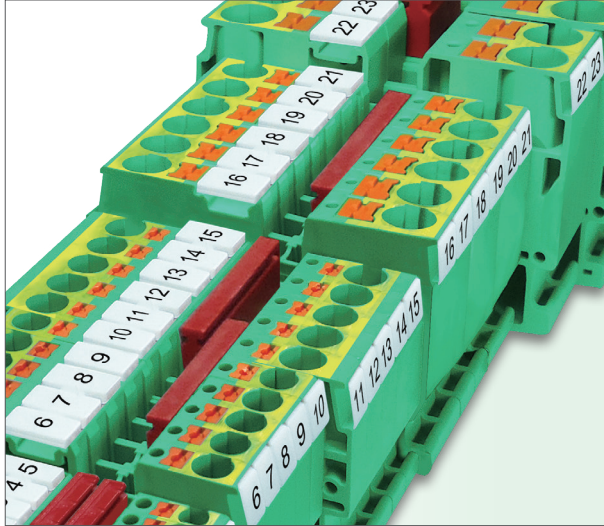


#### Push In Spring Clamp Ground Terminal Blocks

- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Low contact resistance.
- Easy mounting and dismantling from the terminal rail.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

#### 推入式彈片接地型接線座


- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 ( 頂部進線 )
- 抗腐蝕性佳 ( 使用良好的金屬材料 )
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

#### DPT 1.5-PE




<b>Specifications ( 產品規格 )</b>	1.5mm <sup>2</sup>	
<b>Technical Data ( 技術參數 )</b>	<b>Rated voltage / Rated current / Wire Size</b>	
<b>UL</b>	600V / AWG 26-14	
<b>CSA</b>	600V / AWG 26-14	
<b>IEC</b>	500V / 0.14-1.5mm <sup>2</sup>	
<b>Insulating impulse voltage withstand / Pollution degree ( 額定衝擊電壓 / 汙染等級 )</b>	6KV / 3	
<b>Insulation stripping length (mm) ( 剝線長度 )</b>	10mm	
<b>Material / Available Color ( 材質顏色 )</b>		
<b>Rail Dimensions ( 導軌尺寸 )</b>	<b>T / W / H (mm)</b>	
For TS35x 7.5	3.5 x 45 x 32	
For TS35x 15	3.5 x 45 x 39.5	
<b>Accessories ( 附件 )</b>	<b>Cat. No.</b>	<b>Qty.</b>
<b>End Bracket ( 終端擋板 )</b>	SEW35	50
<b>End Plate ( 擋板 )</b>	DD-PT1.5-DP	50
<b>Comb Link ( 邊接式聯接件 )</b>	ODFBS2-3.5	50
	ODFBS3-3.5	50
	ODFBS4-3.5	50
	ODFBS5-3.5	50
	ODFBS10-3.5	10
<b>Marking Tags ( 標記號 )</b>	DUC-TMF3.5	10 ( 側面 144 位 )
	DUC-TM3.5	10 ( 正面 144 位 )
<b>Tool ( 工具 )</b>	DS2 ( 0.4 x 2.0mm )	

## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

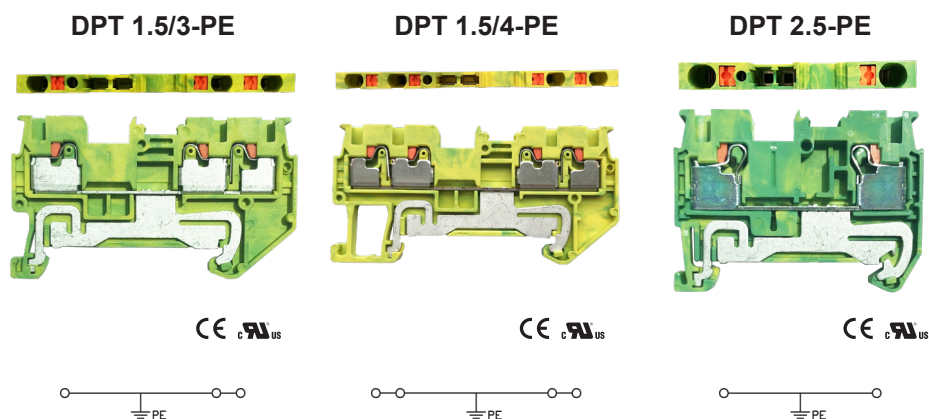


Specifications (產品規格)	1.5mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 26-14	600V / AWG 26-14	600V / AWG 26-12
<b>CSA</b>	600V / AWG 26-14	600V / AWG 26-14	600V / AWG 26-12
<b>IEC</b>	500V / 0.14-1.5mm <sup>2</sup>	500V / 0.14-1.5mm <sup>2</sup>	800V / 0.14-2.5mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	6KV / 3	6KV / 3	8KV / 3
<b>Insulation stripping length (mm) (剝線長度)</b>	10mm	10mm	10mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	3.5 x 54.1 x 32	3.5 x 63.2 x 32	5.2 x 48.5 x 36.5
For TS35x 15	3.5 x 54.1 x 39.5	3.5 x 63.2 x 39.5	5.2 x 48.5 x 44
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT1.5/3-DP    50	DD-PT1.5/4-DP    50	DD-PT2.5-DP    50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-3.5    50 ODFBS3-3.5    50 ODFBS4-3.5    50 ODFBS5-3.5    50 ODFBS10-3.5    10	ODFBS2-3.5    50 ODFBS3-3.5    50 ODFBS4-3.5    50 ODFBS5-3.5    50 ODFBS10-3.5    10	ODFBS2-5    50 ODFBS3-5    50 ODFBS4-5    50 ODFBS5-5    50 ODFBS10-5    10
<b>Marking Tags (標記號)</b>	DUC-TMF3.5    10 (側面 144 位) DUC-TM3.5    10 (正面 144 位)	DUC-TMF3.5    10 (側面 144 位) DUC-TM3.5    10 (正面 144 位)	DUC-TMF5    10 (側面 96 位) DUC-TM5    10 (正面 96 位)
<b>Tool (工具)</b>	DS2 (0.4 x 2.0mm)	DS2 (0.4 x 2.0mm)	DS3 (0.4 x 3.5mm)

## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

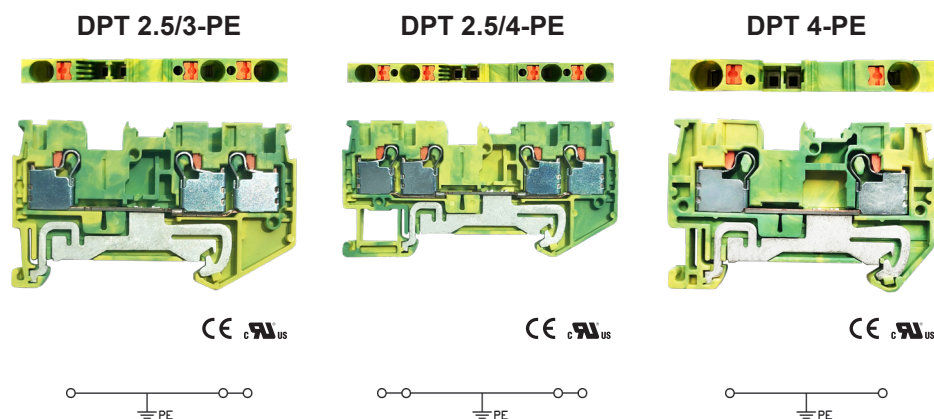

Specifications (產品規格)	2.5mm <sup>2</sup>		2.5mm <sup>2</sup>		4mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
<b>UL</b>	600V / AWG 26-12		600V / AWG 26-12		600V / AWG 24-10	
<b>CSA</b>	600V / AWG 26-12		600V / AWG 26-12		600V / AWG 24-10	
<b>IEC</b>	800V / 0.14-2.5mm <sup>2</sup>		800V / 0.14-2.5mm <sup>2</sup>		800V / 0.2-4mm <sup>2</sup>	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (剝線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>		<b>T / W / H (mm)</b>		<b>T / W / H (mm)</b>	
For TS35x 7.5	5.2 x 60.7 x 36.5		5.2 x 72.4 x 36.5		6.2 x 56.1 x 36.5	
For TS35x 15	5.2 x 60.7 x 44		5.2 x 72.4 x 44		6.2 x 56.1 x 44	
<b>Accessories (附件)</b>	<b>Cat. No.</b>	<b>Qty.</b>	<b>Cat. No.</b>	<b>Qty.</b>	<b>Cat. No.</b>	<b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35	50	SEW35	50	SEW35	50
<b>End Plate (擋板)</b>	DD-PT2.5/3-DP	50	DD-PT2.5/4-DP	50	DD-PT4-DP	50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-5	50	ODFBS2-5	50	ODFBS2-6	50
	ODFBS3-5	50	ODFBS3-5	50	ODFBS3-6	50
	ODFBS4-5	50	ODFBS4-5	50	ODFBS4-6	50
	ODFBS5-5	50	ODFBS5-5	50	ODFBS5-6	50
	ODFBS10-5	10	ODFBS10-5	10	ODFBS10-6	10
<b>Marking Tags (標記號)</b>	DUC-TMF5	10 (側面 96 位)	DUC-TMF5	10 (側面 96 位)	DUC-TMF6	10 (側面 80 位)
	DUC-TM5	10 (正面 96 位)	DUC-TM5	10 (正面 96 位)	DUC-TM6	10 (側面 80 位)
<b>Tool (工具)</b>	DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)		DS3 (0.4 x 3.5mm)	


## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

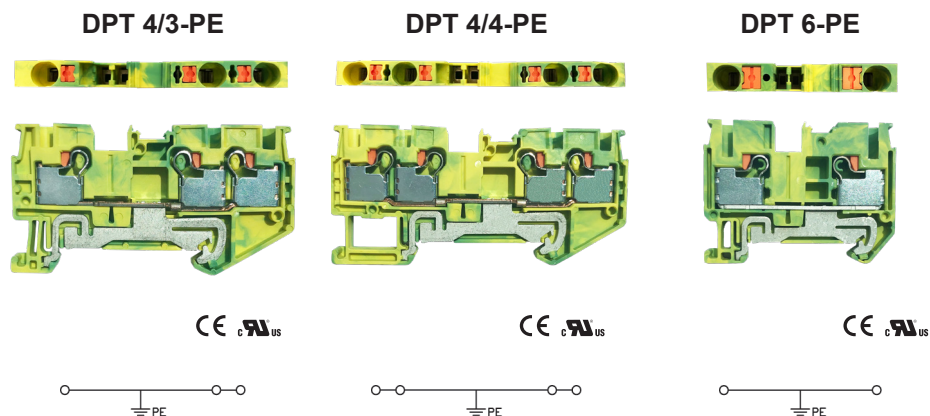


Specifications (產品規格)	4mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 24-10	600V / AWG 24-10	600V / AWG 20-8
<b>CSA</b>	600V / AWG 24-10	600V / AWG 24-10	600V / AWG 20-8
<b>IEC</b>	800V / 0.2-4mm <sup>2</sup>	800V / 0.2-4mm <sup>2</sup>	1000V / 0.5-6mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree</b> (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm)</b> (剝線長度)	10mm	10mm	12mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	6.2 x 66.5 x 36.5	6.2 x 77 x 36.5	8.2 x 57.7 x 43.5
For TS35x 15	6.2 x 66.4 x 44	6.2 x 77 x 44	8.2 x 57.7 x 51
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT4/3-DP    50	DD-PT4/4-DP    50	DD-PT6-DP    50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-6    50 ODFBS3-6    50 ODFBS4-6    50 ODFBS5-6    50 ODFBS10-6    10	ODFBS2-6    50 ODFBS3-6    50 ODFBS4-6    50 ODFBS5-6    50 ODFBS10-6    10	ODFBS2-8    50 ODFBS3-8    50 ODFBS4-8    50 ODFBS5-8    50 ODFBS10-8    10
<b>Marking Tags (標記號)</b>	DUC-TMF6    10 (側面 80 位) DUC-TM6    10 (正面 80 位)	DUC-TMF6    10 (側面 80 位) DUC-TM6    10 (正面 80 位)	DUC-TMF8    10 (側面 56 位) DUC-TM8    10 (正面 56 位)
<b>Tool (工具)</b>	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5cm)	DS4 (0.4 x 5.5mm)

## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座


DPT 6/3-PE




CE cRU US




DPT 6/4-PE




CE cRU US



DPT 10-PE




CE cRU US




Specifications (產品規格)	6mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 20-8	600V / AWG 20-8	600V / AWG 20-6
<b>CSA</b>	600V / AWG 20-8	600V / AWG 20-8	600V / AWG 20-6
<b>IEC</b>	1000V / 0.5-6mm <sup>2</sup>	1000V / 0.5-6mm <sup>2</sup>	1000V / 0.5-10mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)</b>	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (剝線長度)</b>	12mm	12mm	18mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	8.2 x 74.2 x 43.5	8.2 x 90.6 x 43.5	10.2 x 67.7 x 50.5
For TS35x 15	8.2 x 74.2 x 51	8.2 x 90.6 x 51	10.2 x 67.7 x 58
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT6/3-DP    50	DD-PT6/4-DP    50	DD-PT10-DP    50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-8    50 ODFBS3-8    50 ODFBS4-8    10 ODFBS5-8    50 ODFBS10-8    10	ODFBS2-8    50 ODFBS3-8    50 ODFBS4-8    10 ODFBS5-8    50 ODFBS10-8    10	ODFBS2-10    10 ODFBS5-10    10
<b>Marking Tags (標記號)</b>	DUC-TMF8    10 (側面 56 位) DUC-TM8    10 (正面 56 位)	DUC-TMF8    10 (側面 56 位) DUC-TM8    10 (正面 56 位)	DUC-TMF10    10 (側面 48 位) DUC-TM10    10 (正面 48 位)
<b>Tool (工具)</b>	DS4 (0.4 x 5.5mm)	DS4 (0.4 x 5.5mm)	DS5 (0.4 x 6.5mm)

## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座


DPT 10/3-PE




CE cULus




DPTN 16-PE




CE cULus



DPTN 16/3-PE





CE cULus



Specifications (產品規格)	10mm <sup>2</sup>	16mm <sup>2</sup>	16mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	600V / AWG 20-6	600V / AWG 20-4	600V / AWG 20-4
<b>CSA</b>	600V / AWG 20-6	600V / AWG 20-4	600V / AWG 20-4
<b>IEC</b>	1000V / 0.5-10mm <sup>2</sup>	1000V / 0.5-16mm <sup>2</sup>	1000V / 0.5-16mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree</b> (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm)</b> (剝線長度)	18mm	18mm	18mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x 7.5	10.2 x 88.9 x 50.5	12.2 x 77.6 x 51.5	12.2 x 104 x 51.5
For TS35x 15	10.2 x 88.9 x 58	12.2 x 77.6 x 59	12.2 x 104 x 59
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-PT10/3-DP    50	DD-PTN16-DP    50	DD-PTN16/3-DP    50
<b>Comb Link (連接式聯接件)</b>	ODFBS2-10    10 ODFBS5-10    10	ODFBS2-12    10	ODFBS2-12    10
<b>Marking Tags (標記號)</b>	DUC-TMF10    10 (側面 48 位) DUC-TM10    10 (正面 80 位)	DUC-TMF12    10 (側面 40 位) DUC-TM12    10 (正面 40 位)	DUC-TMF12    10 (側面 40 位) DUC-TM12    10 (正面 40 位)
<b>Tool (工具)</b>	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)	DS5 (0.4 x 6.5mm)

## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座


## DPTN 35-PE




<b>Specifications (產品規格)</b>	35mm <sup>2</sup>	
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	
<b>UL</b>	600V / AWG 14-2	
<b>CSA</b>	600V / AWG 14-2	
<b>IEC</b>	1000V / 2.5-35mm <sup>2</sup>	
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)</b>	8KV / 3	
<b>Insulation stripping length (mm) (剝線長度)</b>	25mm	
<b>Material / Available Color (材質顏色)</b>		
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	
For TS35x 7.5	16 x 100 x 63.2	
For TS35x 15	16 x 100 x 70.7	
<b>Accessories (附件)</b>	<b>Cat. No.</b>	<b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35	50
<b>End Plate (擋板)</b>		
<b>Comb Link (邊接式聯接件)</b>	ODFBS2-16	10
<b>Marking Tags (標記號)</b>	DUC-TMF16	10 (側面 32 位)
	DUC-TM16	10 (正面 32 位)
<b>Tool (工具)</b>	DS5 (0.4 x 8.0mm)	

## Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座


DPTTB 1.5-PE



CE cULus




DPTTB 2.5-PE




CE cULus



DPTTB 4-PE



CE cULus



Specifications (產品規格)	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / AWG 26-14	600V / AWG 28-12	600V / AWG 24-10
CSA	600V / AWG 26-14	600V / AWG 28-12	600V / AWG 24-10
IEC	500V / 0.14-1.5mm <sup>2</sup>	800V / 0.08-2.5mm <sup>2</sup>	800V / 0.2-6mm <sup>2</sup>
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (剝線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x 7.5	3.5 x 65.4 x 42.9	5.2 x 78.8 x 47.6	6.2 x 85 x 47.5
For TS35x 15	3.5 x 65.4 x 50.4	5.2 x 78.8 x 55.5	6.2 x 85 x 55
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PTTB1.5-DP 50	DD-PTTB2.5-DP 50	DD-PTTB4-DP 50
Comb Link (邊接式聯接件)	無	無	無
Marking Tags (標記號)	DUC-TMF3.5 10 (側面 144 位) DUC-TM3.5 10 (側面 144 位)	DUC-TMF5 10 (側面 96 位) DUC-TM5 10 (正面 96 位)	DUC-TMF6 10 (側面 80 位) DUC-TM6 10 (側面 80 位)
Tool (工具)	DS2 (0.4 x 2.0mm)	DS3 (0.4 x 3.5mm)	DS3 (0.4 x 3.5mm)