


## C1Kx-S5xxx-x

工業開關 > 金屬開關

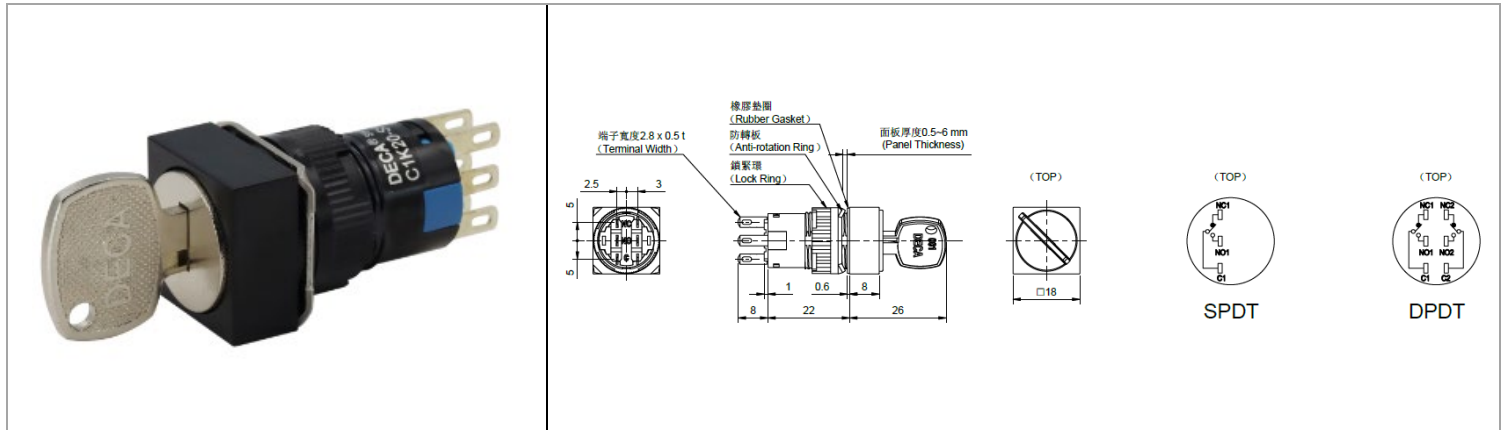

目錄僅供參考，實際規格仍依照產品工程圖面為準

### 產品介紹 Product Description

### 應用標準 Application Standards

UL (UL508, CSA-C22.2 No. 14)	
AC General	125V/5A, 250V/5A
AC resistance	125V/5A, 250V/5A
DC resistance	24V/1A, 125V/0.2A, 250V/0.1A
CCC (GB/T14048.5-2017)	
Ui	250V
Ith	5A
Uimp	1.5kV
AC -12	12V/5A, 30V/5A, 125V/4A, 250V/2A
AC -15	12V/5A, 30V/5A, 125V/3A, 250V/1.5A
DC -12	12V/1A, 30V/1A, 125V/0.32A / 250V/0.16A
DC -13	12V/1A / 30V/1A / 125V/0.22A / 250V/0.11A
IP	IP40, IP65

C1K	□	-	□	□	□	□	-	□
Function	Shape	Degree of Protection	Key No.	Color	Contant			
04	R5: Round	1: IP40	1: 001	K: Black	HG10: DPDT			
05	S5: Square	2: IP65			HG11: SPDT			
06	T5: Rectangular							
18								
20								
11								
10								
07								
12								
08								
09								
23								
21								
22								
15								
13								
14								
24								

## 技術規格 Technical Data

Dielectric Strength	Switch Unit	Between live part and dead metal part: 2,000V AC, 1 min. Between terminals of different poles: 1,500V AC, 1 min. Between terminals of the same poles: 1,500V AC, 1 min. Between Contact and lamp terminals: 1,500V AC, 1 min.
	Illuminated Unit	Between Live Part and ground: 2,000V AC, 1 min.
Contact Resistance		50 mΩ maximum (initial value)
Insulation Resistance		100 MΩ minimum
Operating Humidity		45 to 85% RH (no condensation)
Storage Temperature		-30 to +80°C (no freezing)
Operating Temperature		-25 to +55°C (no freezing)
LED Operating Temperature		-25 to +55°C (no freezing)
Vibration Resistance		5 to 55 Hz, amplitude 0.75 mm
Shock Resistance		Damage limits: 500 m/s <sup>2</sup> Operating extremes: 200 m/s <sup>2</sup>
Mechanical Life		Momentary: 1,000,000 Maintained: 100,000
Electrical Life		50,000
Terminal Style		Solder terminal
Weight(approx.)		9g(C1C)
		10g(C1C) (Illuminated)
		6g(C1P)
		7g(C1S)
		8g(C1S) (Illuminated)
		9g(C1S04, C1S09)
	9g(C1K)	