


## CDU4M

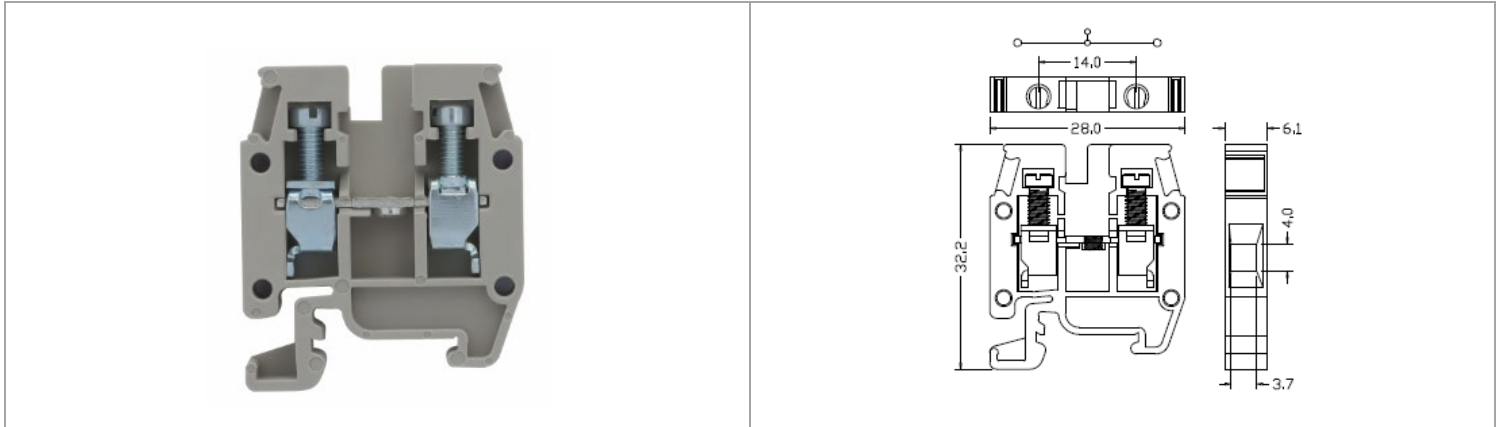

目錄僅供參考，實際規格仍依照產品工程圖面為準

### 產品介紹 Product Description

### 標準法規 Standards and Regulations

<b>IEC 連接數據 IEC Connection data (60947-7-1)</b>		CE
額定電壓 (V) Rated voltage (V)	500	
額定電流 (A) Rated current (A)	32	
導線橫截面積 (mm <sup>2</sup> ) Conductor cross section (mm <sup>2</sup> )	0.5mm <sup>2</sup> ~ 4mm <sup>2</sup>	
<b>CSA 連接數據 CSA Connection data</b>		
額定電壓 (V) Rated voltage (V)	600	
額定電流 (A) Rated current (A)	30	
線徑範圍 (AWG) Wire Range (AWG)	22~10	
<b>UL 連接數據 UL Connection data</b>		
額定電壓 (V) Rated voltage (V)	600	
額定電流 (A) Rated current (A)	30	
線徑範圍 (AWG) Wire Range (AWG)	22~10	
<b>CUL 連接數據 CUL Connection data</b>		
額定電壓 (V) Rated voltage (V)	600	
額定電流 (A) Rated current (A)	30	
線徑範圍 (AWG) Wire Range (AWG)	22~10	
<b>商務資料 Key Commercial Data</b>		
包裝單位 Packing unit	1 PCS	
MOQ Minimum order quantity	50 PCS	
條碼GTIN		
產品重量 Weight per Piece (excluding packing)	4.94 g	
訂貨碼 Custom tariff number		
原產地Country of origin	CN	

### 材料資訊 Material information

絕緣材料 Insulating material	PA66
符合UL 94的可燃性等級 Flammability rating according to UL 94	V0
產品顏色 Color	Beige

最大工作溫度°C Continuous operating temp., max.	105°C
最小工作溫度°C Continuous operating temp., min.	-40°C

## 外型尺寸 Dimensions

寬度 Width	28mm
長度 Length	6.1mm
高度 Height	32.2mm
高度 Height NS 15/5,5	32.7mm

## 一般資訊 General information

產品連接數 Number of connections	2
產品電位 Potentials	1
標籤寬度 Nominal cross section	6mm
安裝指導 Installation Advice	Rail Mounting(導軌安裝)
應用領域 Area of application	機電工程
	能源工程
	機械工程
	運輸工程
	自動工程
軌道條 Type of mounting	TS15/5.5
額定浪湧電壓 Rated surge voltage	6 Kv
汙染程度 Degree of pollution	3
過電壓類別 Overvoltage category	III
絕緣材料組 Insulating material group	I
額定電流 Nominal current IN	30
額定電壓 Nominal voltage UN	600
側邊為開放式 Open side panel	yes
手背防護 Back of the hand protection	guaranteed
手指保護 Finger protection	guaranteed

## 連接數據 Connection data

連接 Connection	1
連接方式 Connection method	Screw connection
螺紋 Screw thread	M3
額定扭矩(N.m) Rated torque (N.m)	5~6.2
撥線長度 Stripping length	6~8 mm
針對管狀端頭 H1/10 和 H1.5/10 須應用的剝線長度 For the wire end ferrules H1/10 and H1.5/10 of stripping length is to apply.	6~8 mm
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/1 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/1	4 mm <sup>2</sup>
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/4 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/4	4 mm <sup>2</sup>
螺絲刀口尺寸 Blade size	0.6 x 3.5 mm

## 環保產品合規 Environmental Product Compliance

China RoHS	
------------	--

**RoHS**  
Compliant