


CPE95

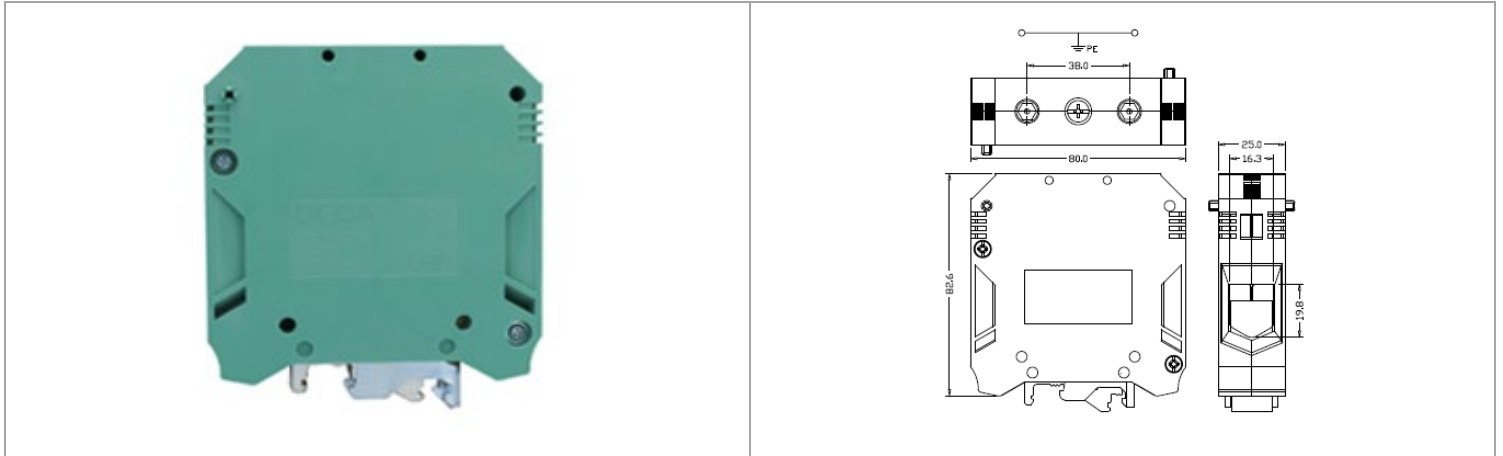

目錄僅供參考，實際規格仍依照產品工程圖面為準

產品介紹 Product Description

標準法規 Standards and Regulations

IEC連接數據 IEC Connection data (60947-7-2)		CE
額定電壓 (V) Rated voltage (V)	-	
額定電流 (A) Rated current (A)	-	
導線橫截面積 (mm ²) Conductor cross section (mm ²)	35mm ² ~ 95mm ²	
CSA連接數據 CSA Connection data		
額定電壓 (V) Rated voltage (V)	-	
額定電流 (A) Rated current (A)	-	
線徑範圍 (AWG) Wire Range (AWG)	2 ~ 4/0	
UL連接數據 UL Connection data		
額定電壓 (V) Rated voltage (V)	-	
額定電流 (A) Rated current (A)	-	
線徑範圍 (AWG) Wire Range (AWG)	2 ~ 4/0	
CUL連接數據 CUL Connection data		cUL[®]us
額定電壓 (V) Rated voltage (V)	-	
額定電流 (A) Rated current (A)	-	
線徑範圍 (AWG) Wire Range (AWG)	2 ~ 4/0	

商務資料 Key Commercial Data

包裝單位 Packing unit	1 PCS
MOQ Minimum order quantity	10 PCS
條碼GTIN	
產品重量 Weight per Piece (excluding packing)	283.25g
訂貨碼 Custom tariff number	
原產地Country of origin	CN

材料資訊 Material information

絕緣材料Insulating material	PA66
符合UL 94的可燃性等級 Flammability rating according to UL94	V0

產品顏色 Color	Green // Yellow
最大工作溫度°C Continuous operating temp., max.	105°C
最小工作溫度°C Continuous operating temp., min.	-40°C

外型尺寸 Dimensions

寬度 Width	80 mm
長度 Length	25 mm
高度 Height	82.6 mm
高度 Height NS 35/7,5	90 mm
高度 Height NS 35/15	97.5 mm

一般資訊 General information

產品連接數 Number of connections	2
產品電位 Potentials	1
標籤寬度 Nominal cross section	6 mm
安裝指導 Installation Advice	Rail Mounting(導軌安裝)
應用領域 Area of application	機電工程
	能源工程
	運輸工程
軌道條 Type of mounting	TS35/7.5
	TS35/15
額定浪湧電壓 Rated surge voltage	8 Kv
汙染程度 Degree of pollution	3
過電壓類別 Overvoltage category	III
絕緣材料組 Insulating material group	I
額定電流 Nominal current IN	-
額定電壓 Nominal voltage UN	-
側邊為開放式 Open side panel	NO
手背防護 Back of the hand protection	guaranteed
手指保護 Finger protection	guaranteed

連接數據 Connection data

連接 Connection	1
連接方式 Connection method	Screw connection
端子螺釘 Terminal Screw	M8
安裝螺釘 Mounting Screw	M6
額定扭矩(端子螺絲) Rated torque (Terminal Screw)	12 N.m
額定扭矩(固定螺絲) Rated torque (Mounting Screw)	2.6~3.7 N.m
撥線長度 Stripping length	25~30 mm
針對管狀端頭 H1/10 和 H1.5/10 須應用的剝線長度 For the wire end ferrules H1/10 and H1.5/10 of stripping length is to apply.	25~30 mm
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/1 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/1	95 mm ²
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/4 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/4	95 mm ²

環保產品合規 Environmental Product Compliance

China RoHS	
------------	--

RoHS
Compliant