


F26S1-x2xxxFx000

工業開關 > 金屬開關

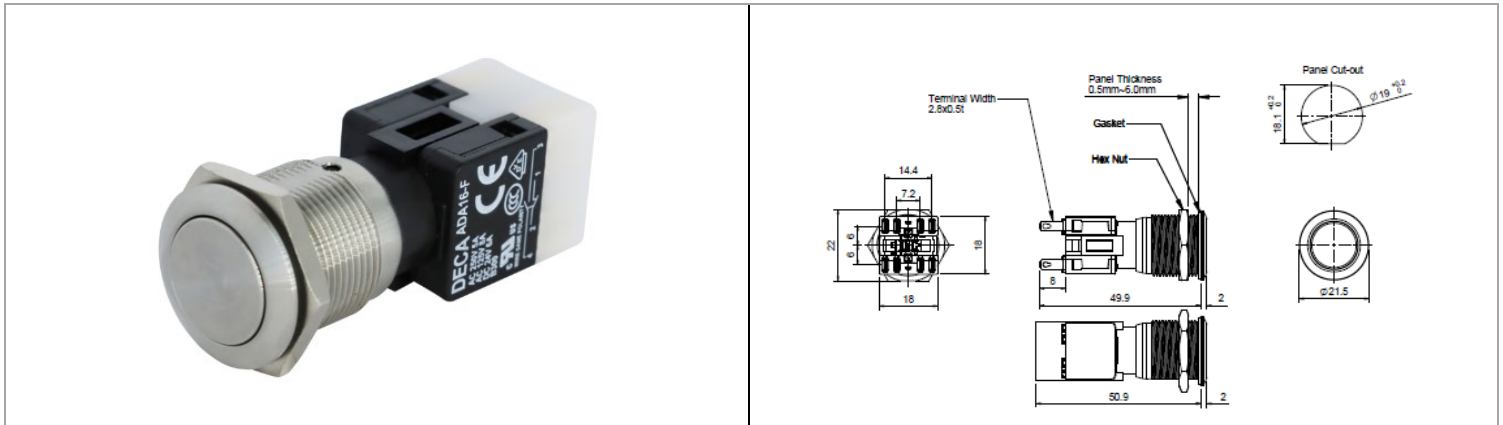

目錄僅供參考，實際規格仍依照產品工程圖面為準

產品介紹 Product Description

應用標準 Application Standards

For UL	
Ui	300V
Ith	8A
AC-12 General	125V/8A , 250V/5A
AC-12 resistance	125V/8A , 250V/5A
AC-15	B300
DC-12 resistance	24V/6A , 250V/0.2A
DC-15	R300
For GB	
Ui	300V
Ith	8A
AC -12	125V/8A , 250V/5A
AC -15	125V/3A , 250V/1.5A
DC -12	24V/6A , 250V/0.2A
DC -13	125V/0.22A , 250V/0.11A
IP	IP67
For IEC/EN	
Ui	250V
Ith	5A
CE	
Ui	300V
Ith	8A
AC -12	125V/8A , 250V/5A
AC -15	125V/3A , 250V/1.5A
DC -12	24V/6A , 250V/0.2A
DC -13	125V/0.22A , 250V/0.11A
IP	IP67

技術規格 Technical Data

Dielectric Strength	1,500V, 60HZ, 1 minute
Contact Resistance	50 mΩ
Insulation Resistance	100 MΩ
Operating Humidity	45 to 85% RH
Storage Temperature	- 40 to +80°C
Operating Temperature	- 25 to +50°C
Mechanical Life	Momentary: 2,000,000 Maintained: 1,000,000
Electrical Life	50,000
Terminal Style	Solder terminal
Torque (max)	3.5Nm
Weight (approx.)	29.5g/21.5g (Stainless Steel/Aluminum)

F26S1-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Function	IP	Contacts	LED Voltage	LED Color	Actuator Options	Material Finish	Lens Color	Mark		
1: Momentary	2:IP67	B: 1 NO+1 NC W/lamp	0: None	N: None	F: Flush	S: Stainless Steel	0: None	00: None		
2: Maintained		A: 2 NO+2 NC W/lamp	2: 6V	G: Green	P: Prominent	P: Brushed Stainless Steel	G: Green	01: Dot		
		D: 1 NO+1 NC	3: 12V	R: Red	D: Domed	A: Aluminum	R: Red	02: Ring		
		C: 2 NO+2 NC	4: 24V	A: Amber		B: Black Aluminum	A: Amber			
				B: Blue			B: Blue			
				W: White						