


SDK2.5

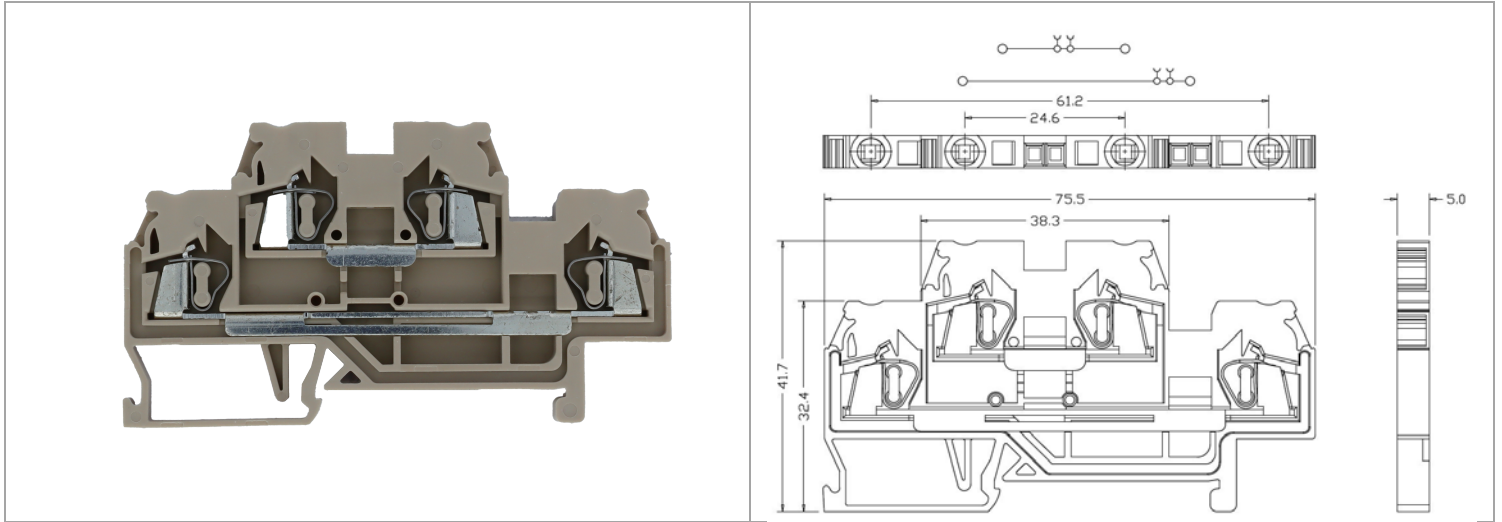

目錄僅供參考，實際規格仍依照產品工程圖面為準

產品介紹 Product Description

標準法規 Standards and Regulations

IEC 連接數據 IEC Connection data (60947-7-1)		CE
額定電壓 (V) Rated voltage (V)	800	
額定電流 (A) Rated current (A)	24	
導線橫截面積 (mm ²) Conductor cross section (mm ²)	0.08mm ² ~ 2.5mm ²	
CSA 連接數據 CSA Connection data		
額定電壓 (V) Rated voltage (V)	600	
額定電流 (A) Rated current (A)	20	
線徑範圍 (AWG) Wire Range (AWG)	28~12	
UL 連接數據 UL Connection data		
額定電壓 (V) Rated voltage (V)	600	
額定電流 (A) Rated current (A)	20	
線徑範圍 (AWG) Wire Range (AWG)	28~12	
CUL 連接數據 CUL Connection data		cUL[®]us
額定電壓 (V) Rated voltage (V)	600	
額定電流 (A) Rated current (A)	20	
線徑範圍 (AWG) Wire Range (AWG)	28~12	
商務資料 Key Commercial Data		
包裝單位 Packing unit	1 PCS	
MOQ Minimum order quantity	50 PCS	
條碼GTIN		
產品重量 Weight per Piece (excluding packing)	11.93 g	
訂貨碼 Custom tariff number		
原產地Country of origin	CN	

材料資訊 Material information

絕緣材料 Insulating material	PA66
符合UL 94的可燃性等級 Flammability rating according to UL 94	V0
產品顏色 Color	Beige
最大工作溫度 °C Continuous operating temp., max.	105°C
最小工作溫度 °C Continuous operating temp., min.	-40°C

外型尺寸 Dimensions

寬度 Width	75.5 mm
長度 Length	5 mm
高度 Height	41.7 mm
高度 Height NS 35/7,5	44.6 mm
高度 Height NS 35/15	52.1 mm

一般資訊 General information

產品連接數 Number of connections	4
產品電位 Potentials	1
標籤寬度 Nominal cross section	5mm
安裝指導 Installation Advice	Rail Mounting(導軌安裝)
應用領域 Area of application	機電工程
	能源工程
	機械工程
	運輸工程
	自動工程
軌道條 Type of mounting	TS35/7.5
	TS35/15
額定浪湧電壓 Rated surge voltage	8 Kv
汙染程度 Degree of pollution	3
過電壓類別 Overvoltage category	III
絕緣材料組 Insulating material group	I
額定電流 Nominal current I _N	20
額定電壓 Nominal voltage U _N	600
側邊為開放式 Open side panel	yes
手背防護 Back of the hand protection	guaranteed
手指保護 Finger protection	guaranteed

連接數據 Connection data

連接 Connection	1
連接方式 Connection method	Cage clamp
撥線長度 Stripping length	8~9 mm
針對管狀端頭 H1/10 和 H1.5/10 須應用的剝線長度 For the wire end ferrules H1/10 and H1.5/10 of stripping length is to apply.	8~9 mm
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/1 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/1	1.5 mm ²
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/4 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/4	1.5 mm ²
螺絲刀口尺寸 Blade size	0.5 x 3mm

環保產品合規 Environmental Product Compliance

China RoHS

RoHS
Compliant