


SDUB4-A

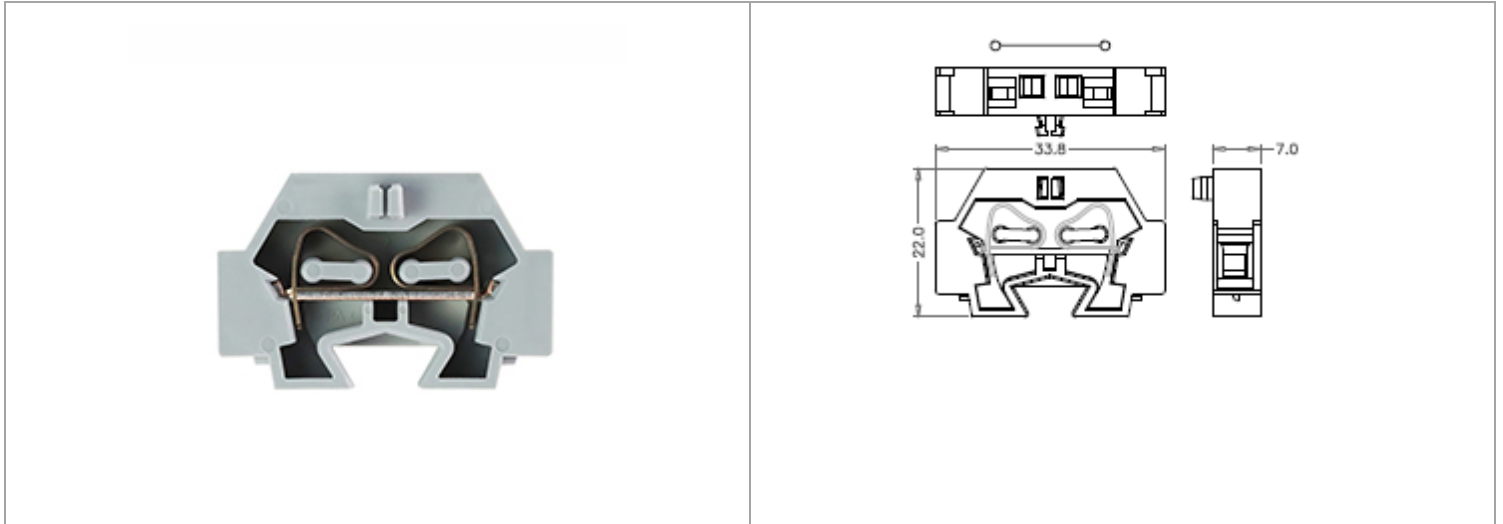


目錄僅供參考，實際規格仍依照產品工程圖面為準

產品介紹 Product Description

標準法規 Standards and Regulations

IEC 連接數據 IEC Connection data (60947-7-1)		CE	
額定電壓 (V) Rated voltage (V)	690		
額定電流 (A) Rated current (A)	24		
導線橫截面積 (mm ²) Conductor cross section (mm ²)	0.08mm ² ~ 4mm ²		
CSA 連接數據 CSA Connection data			
額定電壓 (V) Rated voltage (V)	300		
額定電流 (A) Rated current (A)	25		
線徑範圍 (AWG) Wire Range (AWG)	28~12		
UL 連接數據 UL Connection data			
額定電壓 (V) Rated voltage (V)	300		
額定電流 (A) Rated current (A)	20		
線徑範圍 (AWG) Wire Range (AWG)	28~12		
CUL 連接數據 CUL Connection data		cUL[®]us	
額定電壓 (V) Rated voltage (V)	300		
額定電流 (A) Rated current (A)	20		
線徑範圍 (AWG) Wire Range (AWG)	28~12		
商務資料 Key Commercial Data			
包裝單位 Packing unit	1 PCS		
MOQ Minimum order quantity	25 PCS		
條碼GTIN			
產品重量 Weight per Piece (excluding packing)	3.7 g		
訂貨碼 Custom tariff number			
原產地Country of origin	CN		

材料資訊 Material information

絕緣材料 Insulating material	PA66
符合UL 94的可燃性等級 Flammability rating according to UL 94	V0
產品顏色 Color	
最大工作溫度 °C Continuous operating temp., max.	105°C
最小工作溫度 °C Continuous operating temp., min.	-40°C

外型尺寸 Dimensions

寬度 Width	33.8 mm
長度 Length	7 mm
高度 Height	22 mm

一般資訊 General information

產品連接數 Number of connections	2
產品電位 Potentials	1
安裝指導 Installation Advice	With anap-in mounting foot; for plate thickness 0.6-1.2mm ;fixing 3.5mm φ 帶有嵌入式安裝腳，適用於板厚度0.6-1.2mm，固定孔3.5mm φ
應用領域 Area of application	機電工程 能源工程 機械工程 運輸工程 自動工程
額定浪湧電壓 Rated surge voltage	8 Kv
汙染程度 Degree of pollution	3
過電壓類別 Overvoltage category	III
絕緣材料組 Insulating material group	I
側邊為開放式 Open side panel	yes
手背防護 Back of the hand protection	guaranteed
手指保護 Finger protection	guaranteed

連接數據 Connection data

連接 Connection	1
連接方式 Connection method	Cage clamp
撥線長度 Stripping length	9~10 mm
針對管狀端頭 H1/10 和 H1.5/10 須應用的剝線長度 For the wire end ferrules H1/10 and H1.5/10 of stripping length is to apply.	9~10 mm
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/1 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/1	2.5 mm ²
導線連接截面積，多股導線，帶管狀端頭 DIN 46228/4 Wire connection cross-section, stranded conductor with wire-end ferrules DIN 46228/4	2.5 mm ²
螺絲刀口尺寸 Blade size	0.6 x 3.5mm

環保產品合規 Environmental Product Compliance

China RoHS	
------------	--

RoHS
Compliant