











TYPE:T30M (貫通式端子台) **Modular**(モジュール式) **c** **UL**[®] **us**

Pitch:6.35mm

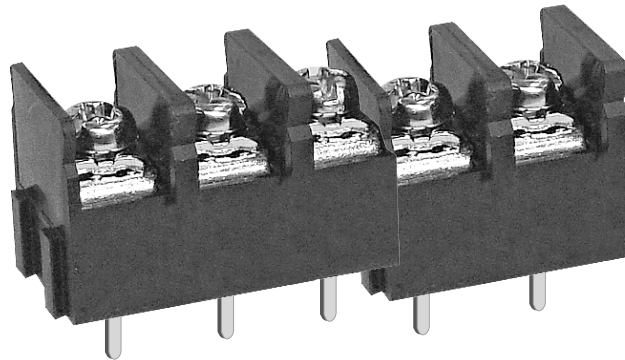

ORDER GUIDE(注文方法):

T30M B S11 - 05

Body(本体)		Terminal style(端子スタイル)	Poles(極数)
<p>A: 取付穴・壁有り、カバー無し (Mount Ends)</p> 	<p>C: 取付穴有り、金具・壁無し、 カバー付き (Mount with Cover)</p> 	<p>S11:  </p>	02
<p>B: 取付穴・カバー無し、壁有り (Barrier Ends)</p> 	<p>E: 取付穴無し、壁有り、 カバー付き (Barrier Ends with Cover)</p> 	<p>S64:  </p>	...
<p>R: 取付穴有り、壁・カバー無し (Without wall・with metals)</p> 			30

SPECIFICATION(規格,仕様):

Terminal :	Brass, Tin plated,0.8 t	端子 :	黄銅板 ハンダメッキ,0.8 t
Insulator body :	Polyamide66(UL94V-0), Green	主絶縁体 :	Polyamide66(UL94V-0), 緑色
Screw :	M3.0, steel, Ni plated	ネジ :	M3.0, 鉄ニッケルメッキ
Cover :	PC	カバー :	PC
Operation temperatures :	-40° C to +120° C	使用温度範囲 :	-40° C to +120° C
Rated current :	10Amp 300V	定格 :	10Amp 300V
Insulation withstands volt :	2000V 1min	耐電圧 :	2000V 一分間
Insulation resistance :	2000MΩ at DC 500V	絶縁抵抗 :	DC 500V 2000MΩ
PCB hole Dia :	ø 1.6mm~ø 1.8mm	基板穴径 :	ø 1.6mm~ø 1.8mm
Wire range :	16~30 AWG	電線径 :	16~30 AWG
Screw torque :	10 lb-in	ネジ締付トルク :	10 lb-in
	Screw with washer		ワッシャー付ネジ

.250" PCB Barrier Terminal Blocks



TYPE:T30M

Modular(モジュール式)

Pitch:6.35mm



T30MBS11-04

Terminal style: S11

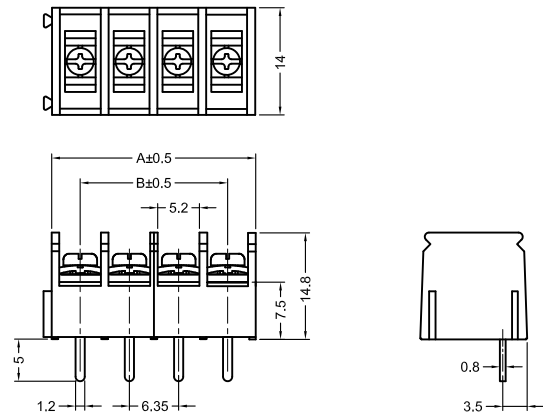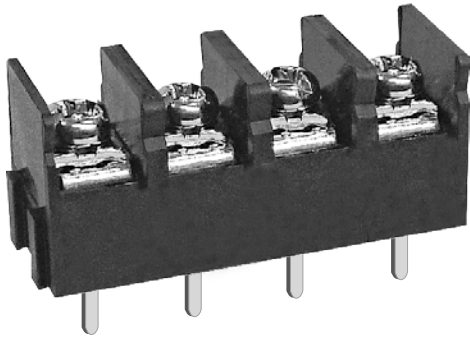

T30MBS64-04

Terminal style: S64

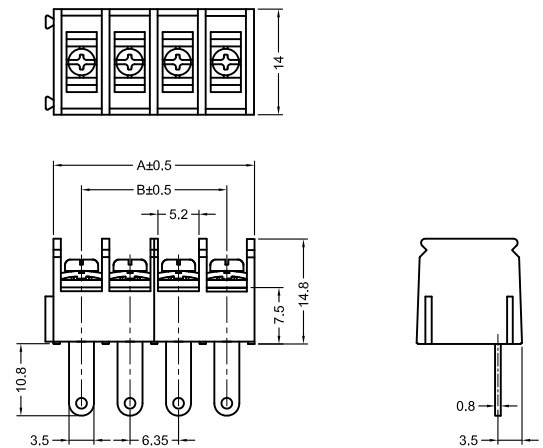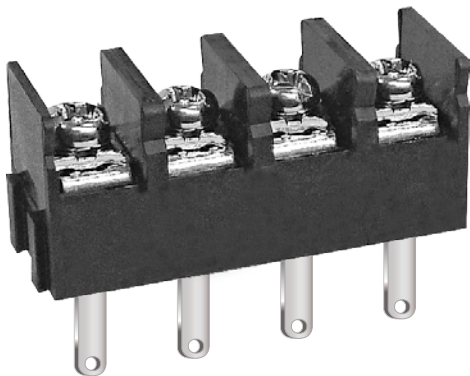

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A(mm)	13.70	20.05	26.40	32.75	39.10	45.45	51.80	58.15	64.50	70.85	77.20	83.55	89.90	96.25	102.60
B(mm)	6.35	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20	82.55	88.90	95.25
Poles	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
A(mm)	108.95	115.30	121.65	128.00	134.35	140.70	147.05	153.40	159.75	166.10	172.45	178.80	185.15	191.50	
B(mm)	101.60	107.95	114.30	120.65	127.00	133.35	139.70	146.05	152.40	158.75	165.10	171.45	177.80	184.15	

.250" PCB Barrier Terminal Blocks



DECA[®]
SwitchLab

TYPE:T30M (貫通式端子台)



Modular(モジュール式)

Pitch:6.35mm



T30MBS11-02





T30MBS11-03




T30MRS11-02




T30MRS11-03



T30M-R01





























































BC30M-□□



T30MBS11-02		2 pole modular
T30MBS11-03		3 pole modular
T30MRS11-02		2 pole modular w/o wall (right side)
T30MRS11-03		3 pole modular w/o wall (right side)
T30M-R01		mounting hole
BC30M-□□		clear cover

ORDER GUIDE

Housing	Assemble Breakdown			
 T30MBS11-02	 T30MBS11-02			
 T30MBS11-03	 T30MBS11-03			
 T30MBS11-04	 T30MRS11-02	 T30MBS11-02		
 T30MBS11-05	 T30MRS11-02	 T30MBS11-03		
 T30MBS11-06	 T30MRS11-03	 T30MBS11-03		
 T30MBS11-07	 T30MRS11-02	 T30MRS11-02	 T30MBS11-03	
 T30MBS11-08	 T30MRS11-02	 T30MRS11-03	 T30MBS11-03	
 T30MBS11-09	 T30MRS11-03	 T30MRS11-03	 T30MBS11-03	
 T30MBS11-10	 T30MRS11-02	 T30MRS11-02	 T30MRS11-03	 T30MBS11-03
 T30MBS11-11	 T30MRS11-02	 T30MRS11-03	 T30MRS11-03	 T30MBS11-03
 T30MBS11-12	 T30MRS11-03	 T30MRS11-03	 T30MRS11-03	 T30MBS11-03
 T30MOS11-02	 T30M-R01	 T30MBS11-02	 T30M-R01	
 T30MOS11-03	 T30M-R01	 T30MBS11-03	 T30M-R01	
 T30MOS11-04	 T30M-R01	 T30MRS11-02	 T30MBS11-02	 T30M-R01
 T30MOS11-05	 T30M-R01	 T30MRS11-02	 T30MBS11-03	 T30M-R01